


Fire damper:



Single blade cut-off fire dampers for comfort ventilation systems

Model FID S/S p/P & FID S/S p/O

Technical Catalogue

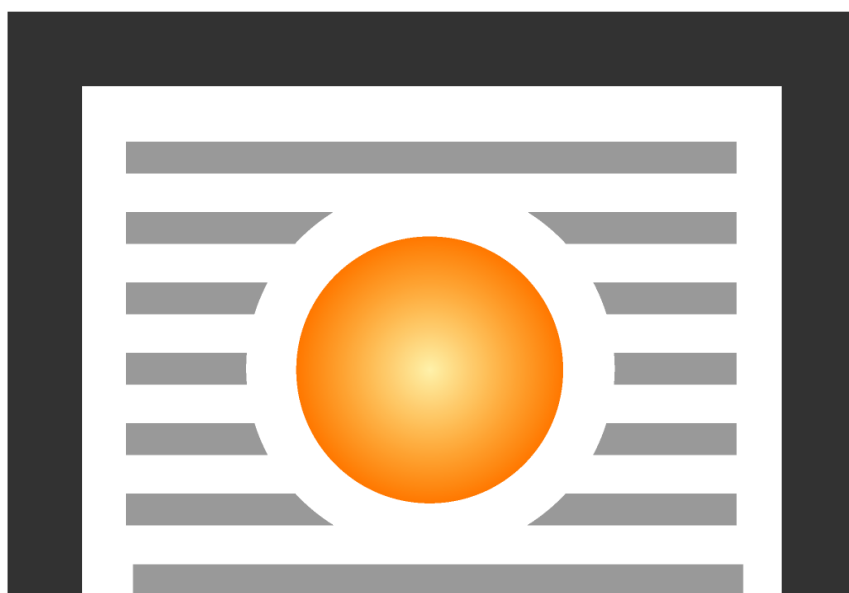

SAFE • VENT®



Table of content

1. Application	4
2. Design	5
3. Versions	5
3.1 FID S/S – the cut-off fire damper for ventilation ducts with an actuator with a return spring – damper closing and opening with an actuator	5
3.2 FID S/S – the cut-off fire damper for ventilation ducts with a spring drive and thermal trigger..	7
3.3 FID S/S – the cut-off fire damper for ventilation ducts with a spring drive and an integrated thermal trigger, optionally equipped with an electromagnetic trigger and limit switches	8
4. Dimensions	10
5. Installation	11
5.1 Preparation of installation openings	11
5.2 Sample installation in lightweight walls of plaster-cardboard panels	11
5.3 Sample installation in concrete and masonry walls	13
5.4 Sample installation in ceilings	14
5.5 Sample installation in sets	18
6. Technical parameters of FID S/S p/P rectangular dampers	19
7. Technical parameters of FID S/S p/O circular dampers	26
8. Estimated Weights of FID S/S p/P dampers for rectangular ventilation ducts [kg]	26
9. Estimated Weights of FID S/S p/O dampers for rectangular ventilation ducts [kg]	27
10. Marking	27
11. Power Supply Control	29
11.1 Cooperation with smoke exhaust/cut-off dampers – drive quick selection table	29
11.2 Actuators	30
11.2.1 BF electric actuators	30
11.2.2 BE, BLE electric actuators	32
11.2.3 BFL, BFN ELECTRIC ACTUATORS	33
11.2.4 EXBF actuators	34
11.3 RST trigger control mechanisms	35
11.3.1 Independent limit switches – RST version	35
11.3.2 Switch specifications	35
11.4 RST-KW1 mechanisms	36
11.4.1 Description of electrical connections:	36
11.5 Manufacture standards	37
11.5.1 FID S/S c/P damper	37
11.5.2 FID S/S p/P, FID S/S p/O, FID S/V p/P damper	38

11.5.3 FID PRO/S damper	38
11.5.4 WIP/S, WIP/V, WIP/V-M, WIP/T, WIP/T-G damper.....	38
11.5.5 WIP PRO/S, WIP PRO/V, WIP PRO/V-M damper with an actuator	38
11.5.6 WIP PRO/S, WIP PRO/V, VIP PRO/V-M damper with RST-KW1 mechanism	39



ATEST HIGIENICZNY



CERTYFIKACJA PRODUKTU



- EIS120
- Certificate of constancy of performance 1488-CPR-0422/W and 1396-CPR-0103.
- Dampers certified for compliance with EN 15650.
- Dampers qualified under EN 13501-3 and tested under EN 1366-2.
- Cut-off dampers with the fire resistance independent of airflow direction and installation side.
- Dampers for rectangular and circular ventilation ducts.


1. Application

The FID S/S p/P and FID S/S p/O cut-off dampers are designed for use in general ventilation systems, where those systems pass through construction partitions.

During a fire, the dampers preserve the fire resistance of the construction partition where ventilation and air conditioning ducts are routed through. Furthermore, they prevent the spreading of fire, smoke and burning fumes to the remaining part of the building which is not on fire. During normal system operation, the damper blade is open. In case of fire, the damper blade closes.

Additionally, FID S/S dampers may be used as relief dampers in gas extinguishing systems, in which case they are equipped with drives without thermoelectric or thermal triggers.

2. Design

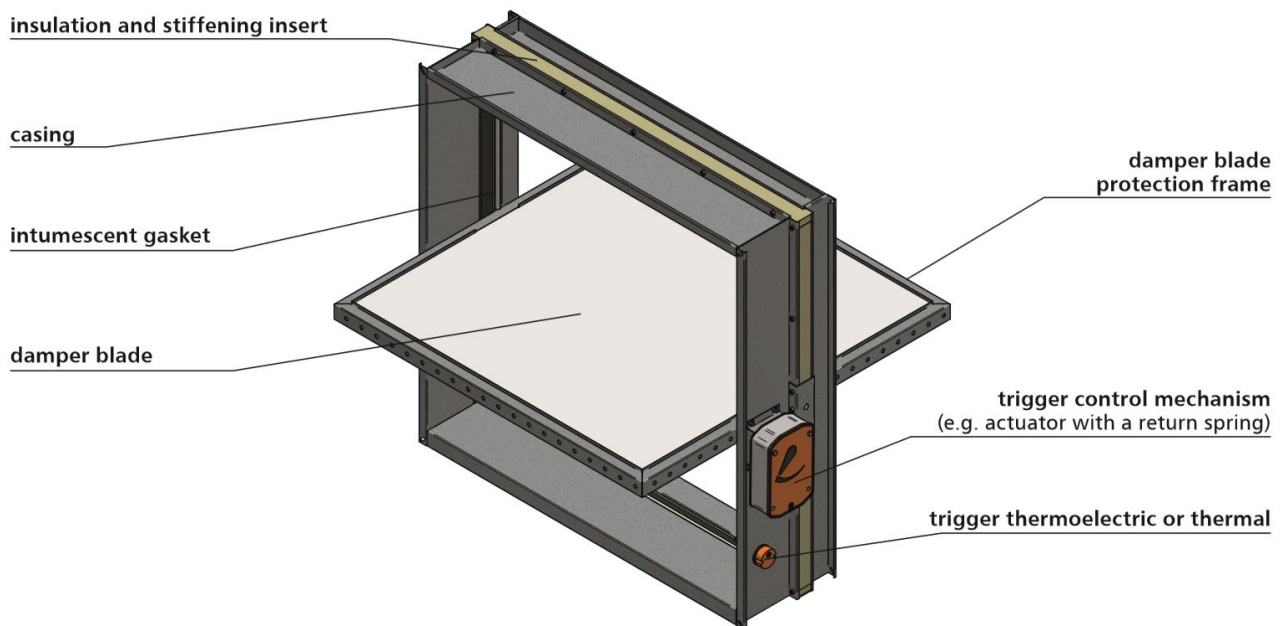

The FID S/S cut-off dampers consist of a casing with a rectangular (FID S/S p/P) or circular (FID S/S p/O) cross-section, made of two segments separated with a fire-proof panel with the cross-section of 20 x 40 mm, a moving damper blade and a trigger control mechanism, which is activated remotely or automatically by tripping a thermal or thermoelectric trigger.

Standard damper casing is made of galvanised steel sheet. For chemically aggressive environments, special manufacture casing is used, in which steel elements are made of 1.4404 acid-proof steel sheet, while other elements are impregnated. The casing total length is at least 296 mm. Dampers may be made with an extension element, in such case the casing length is 400 mm.

The damper blade is made of a fire-proof panel with the total thickness of 40 mm, edge is covered with a reinforcement metal profile. The inner side of the fire damper casing is equipped with an intumescent gasket. There are stop profiles fastened to the inner casing surface, which limit the rotating motion of the damper blade. The stop profiles are finished with a polyethylene ventilation-grade seal. In dampers with a rectangular cross-section, both ends are finished with flange connections, and in circular dampers, with nipple, muff or flange connections.

3. Versions

3.1 FID S/S – the cut-off fire damper for ventilation ducts with an actuator with a return spring – damper closing and opening with an actuator

During normal operation, the damper blade of the fire damper remains open. In case of fire, the blade closes automatically or remotely when the power supply is cut off.


The FID S/S c/P dampers are equipped with a trigger control Belimo mechanisms BF, BFL, BFN, BF-TL, EXBF - axial actuator with a return spring, powered with 24 V AC/DC or 230 V AC, with thermoelectric trigger 72°C (optionally it is possible to use triggers with the nominal tripping temperature of 95°C). BFL-

series actuators are used in dampers with the height up to 600 mm and the diameter up to 550 mm. BFN-series actuators are used in dampers with the height up to 1000 mm and the diameter up to 630 mm.


BF, BFL, BFN, BF-TL, EXBF series actuators are equipped with limit switches used to monitor the blade position. Furthermore, the mechanical position indicator is placed on the actuator.

The thermoelectric trigger is equipped with a test switch and a power supply indicator (LED).

Dampers with Belimo actuators: analogue BF, BFL, BFN, digital BF-TL, EXBF explosion proof actuators close thanks to thermoelectric trigger tripping or power supply cut-off as a result of the actuator return spring action. The dampers open when the power supply voltage is applied to the actuator terminals. Furthermore, dampers with those actuators may be opened manually using a key.

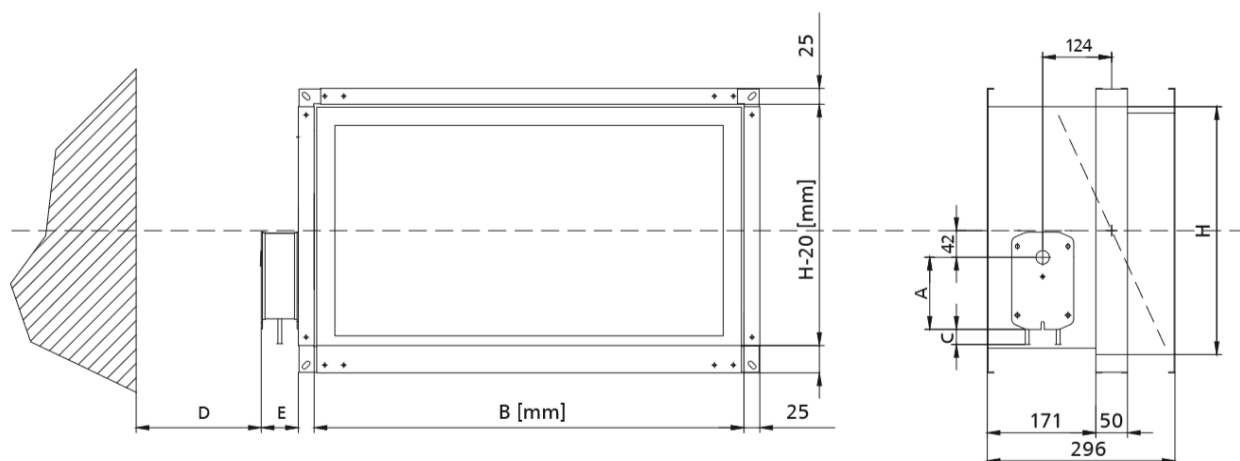

Mechanism	A	C	D	E
BFN	157	30	75	62
BFL	138	30	75	58
BF24TL-ST	198	10	75	70
EXBF	225	55	75	175
BF	198	10	75	70

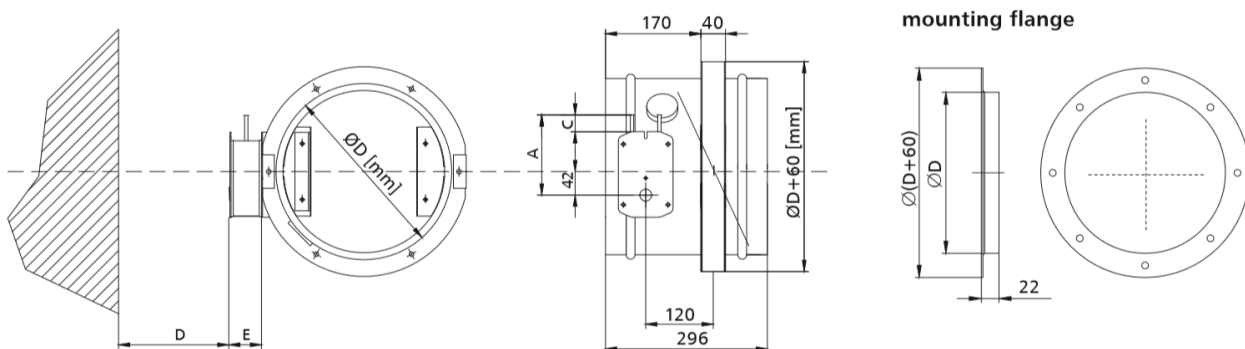


Mechanism	A	C	D	E
BFN	157	30	75	42
BFL	138	30	75	38
BF24TL-ST	198	10	75	50
EXBF	225	55	75	160
BF	198	10	75	50


3.2 FID S/S – the cut-off fire damper for ventilation ducts with a spring drive and thermal trigger

During normal operation, the damper blade of the fire damper remains open. In case of fire, the blade closes automatically.

The FID S/S dampers are equipped with a RST trigger control mechanism with a drive spring (without an integrated thermal trigger). In this case, a thermal trigger 74°C (optionally 95°C) is installed outside the damper mechanism, on the damper blade itself. After the nominal temperature is exceeded, the thermal trigger is tripped and the blade closes. On the RST mechanism, there is a mechanical blade position indicator. It is possible to equip the damper with WK1 or WK2 limit switches used to signal the blade position state.

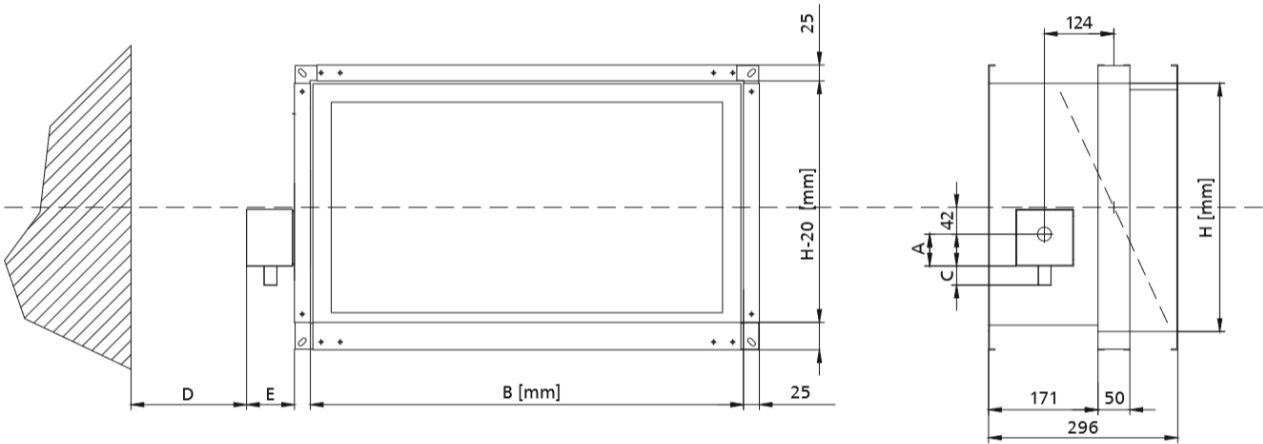

Mechanism	A	C	D	E
RST	50	30	75	75

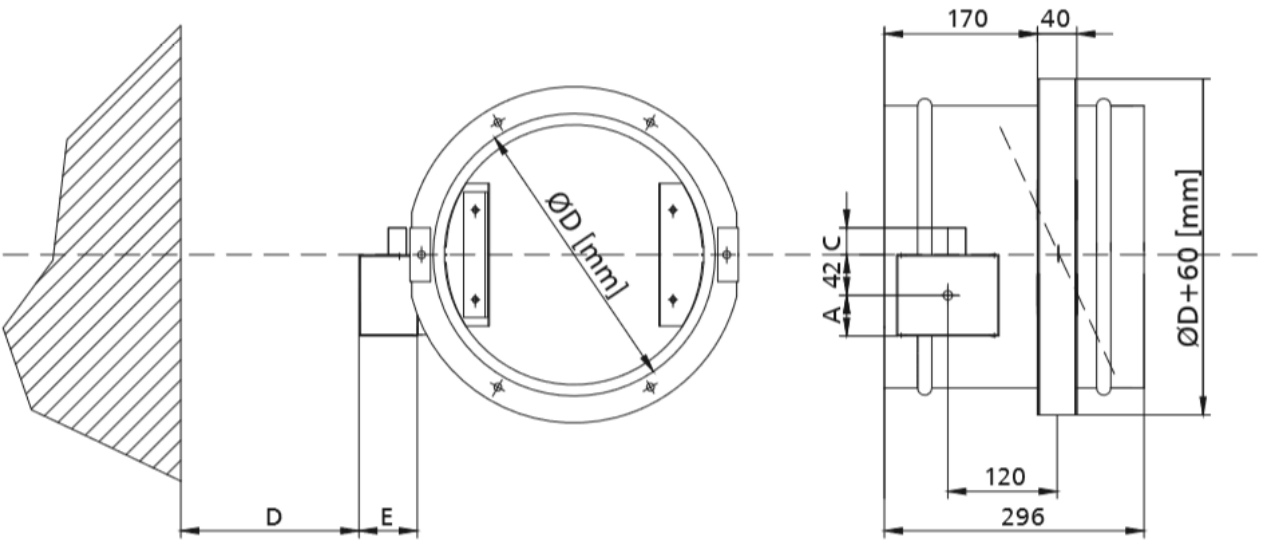


Mechanism	A	C	D	E
RST	40	30	75	55


3.3 FID S/S – the cut-off fire damper for ventilation ducts with a spring drive and an integrated thermal trigger, optionally equipped with an electromagnetic trigger and limit switches

During normal operation, the damper blade of the fire damper remains open. In case of fire, the blade closes automatically or, in case of a damper with an electromagnetic trigger, additionally remotely using the fire automation.

The FID S/S dampers are equipped with a **RST-KW1** trigger control mechanism with a drive spring and a cam-lever system. A thermal trigger 74°C (optionally at 95°C) is integrated with the damper mechanism. After the nominal temperature is exceeded, the thermal trigger is tripped and the blade closes. On the RST-KW1 mechanism, there is a mechanical blade position indicator. It is possible to equip a trigger control mechanism with an electromagnetic trigger activated by the application („pulse”) or removal („break”) of the power supply voltage and with limit switches used to signal the blade position state. The mechanism has a function to test and blade button-release. Blade re-opening is activated manually. It is not required to dismantle the system to replace the thermal trigger. The RST-KW1 mechanism may be replaced with an electric actuator.

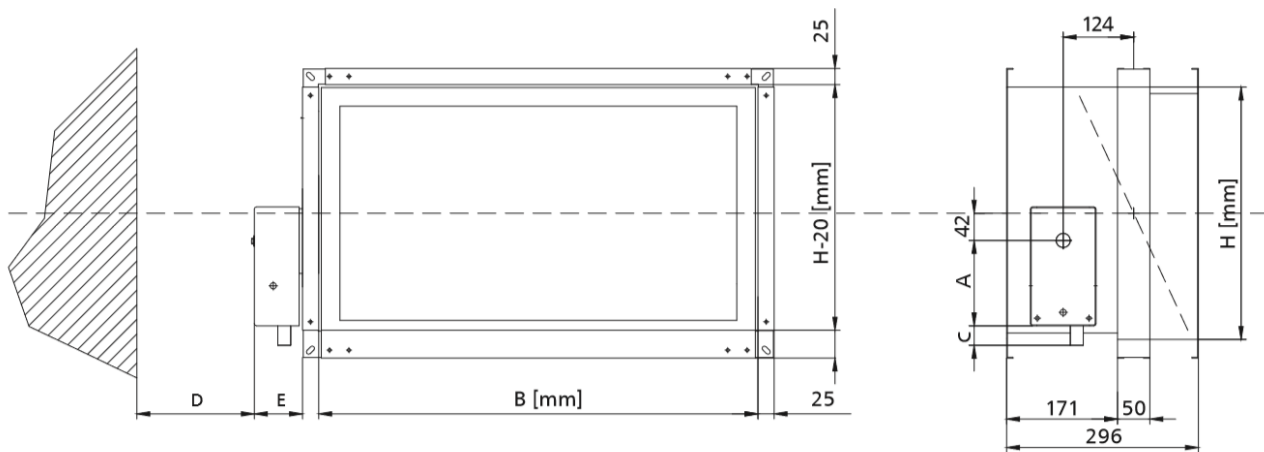

Mechanism	A	C	D	E
RST-KW1	130	30	75	85

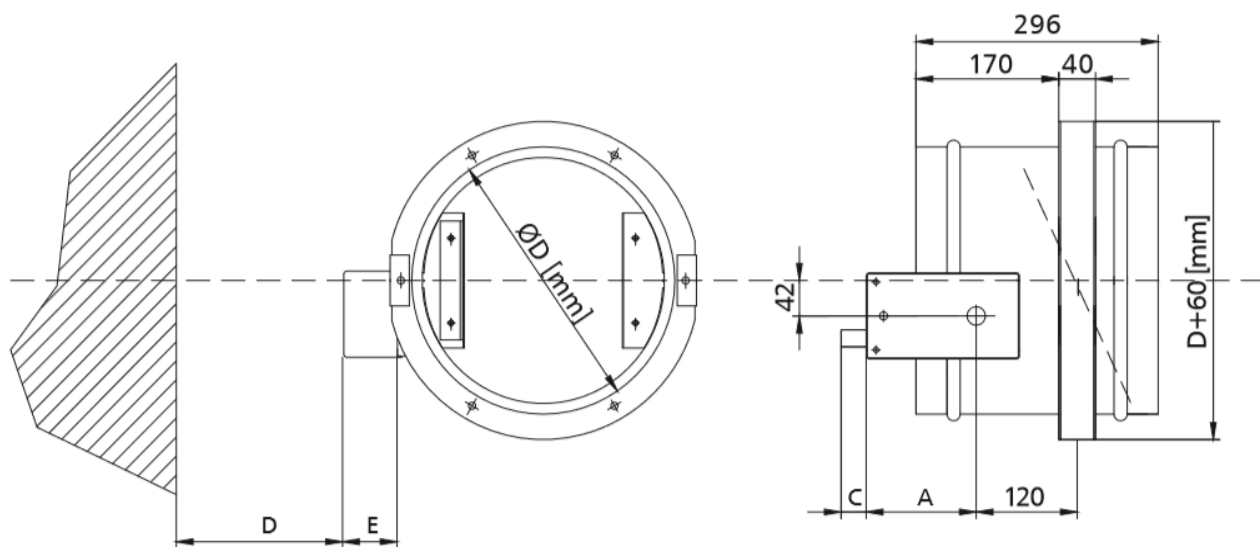

Mechanism	A	C	D	E
RST-KW1	130	30	75	65

4. Dimensions

Rectangular dampers:



- Nominal width B: from 200 mm to 1500 mm
- Nominal height H: from 200 mm to 1500 mm
- The maximum cross-section surface of one damper up to 1.8 m²

Apart from the standard dimensions, fire dampers may be manufactured with intermediate dimensions (in 1 mm increments, in the given range).

Circular dampers:

- Nominal diameter D from 125 to 630 mm

Apart from the standard dimensions, fire dampers can be manufactured with intermediate dimensions (in 1 mm increments, in the given range).

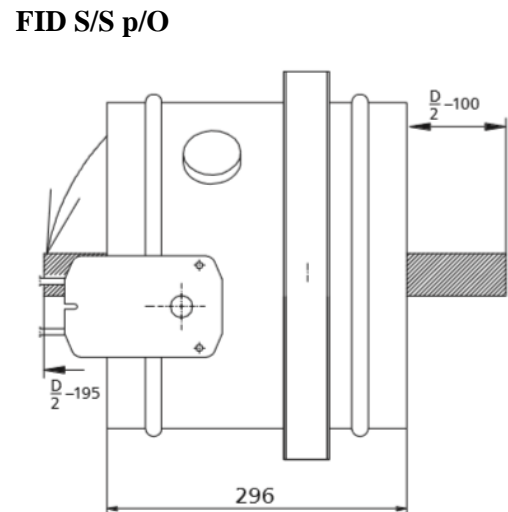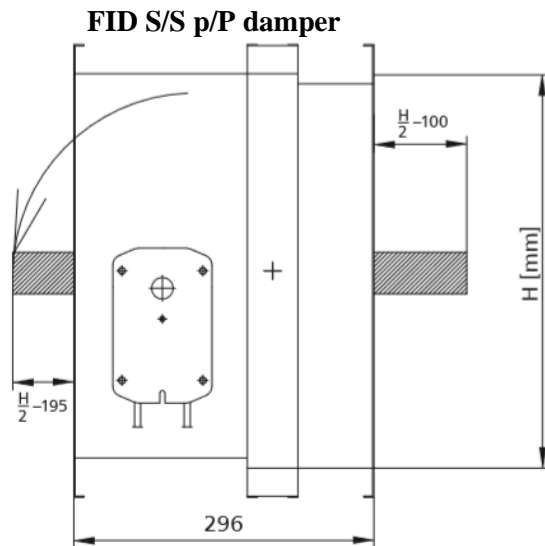


5. Installation

The FID S/S p/P rectangular dampers are EI120(ve ho i↔o)S-rated when installed in concrete partitions made of full bricks or cellular concrete blocks with the thickness of at least 110 mm, lightweight walls of cardboard-plaster panels on a steel framework with the thickness of at least 125 mm and the resistance class of not less than EI120 and concrete ceilings with the thickness of at least 150 mm.


The FID S/S p/O circular dampers are EI120(ve ho i↔o)-rated when installed in concrete partitions made of full bricks or cellular concrete blocks with the thickness of at least 110 mm, lightweight walls of cardboard-plaster panels on a steel framework with the thickness of at least 125 mm and the resistance class of not less than EI120 and concrete ceilings with the thickness of at least 150 mm.

5.1 Preparation of installation openings

FID S/S p/P damper

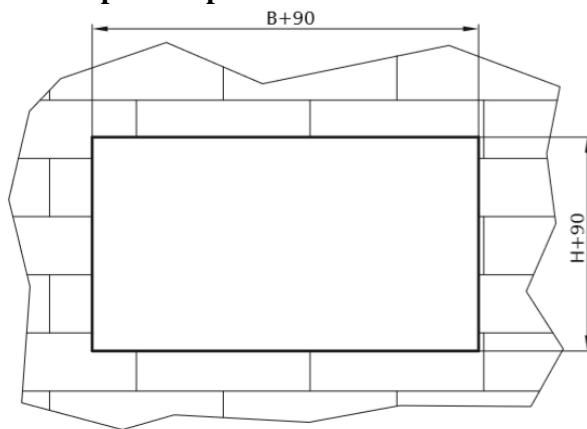


FID S/S p/O damper

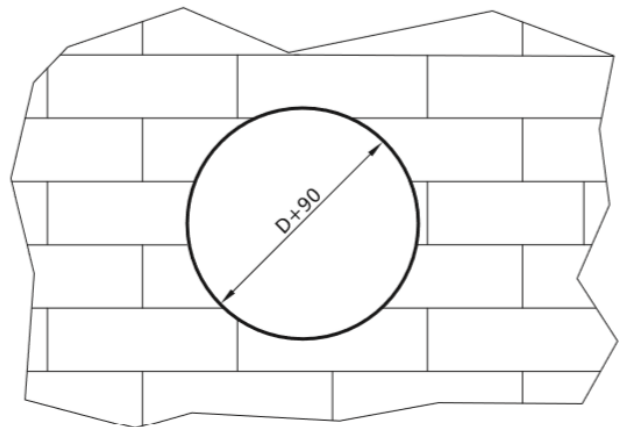

5.2 Sample installation in lightweight walls of plaster-cardboard panels

FID S/S p/p damper

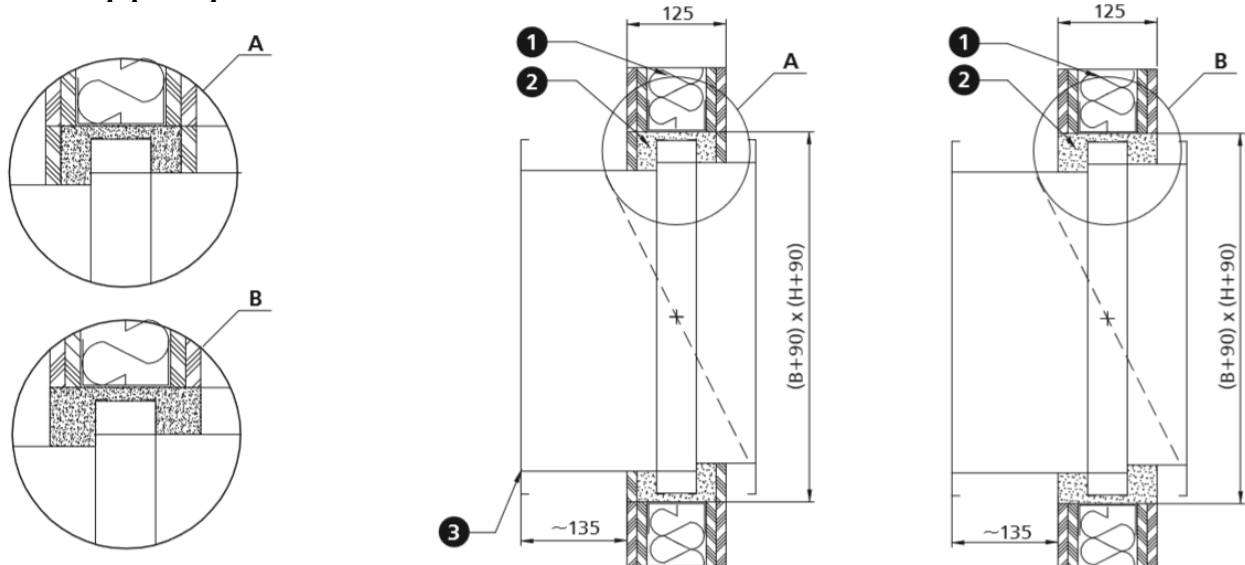


1. lightweight wall
2. sealing – plaster mortar*
3. fire damper FID S

i It is possible to use a different sealing which ensures the required fire resistance


FID S/S p/O damper

1. lightweight wall
2. sealing – plaster mortar*
3. fire damper FID S
4. circumferential gypsum board trim

i It is possible to use a different sealing which ensures the required fire resistance

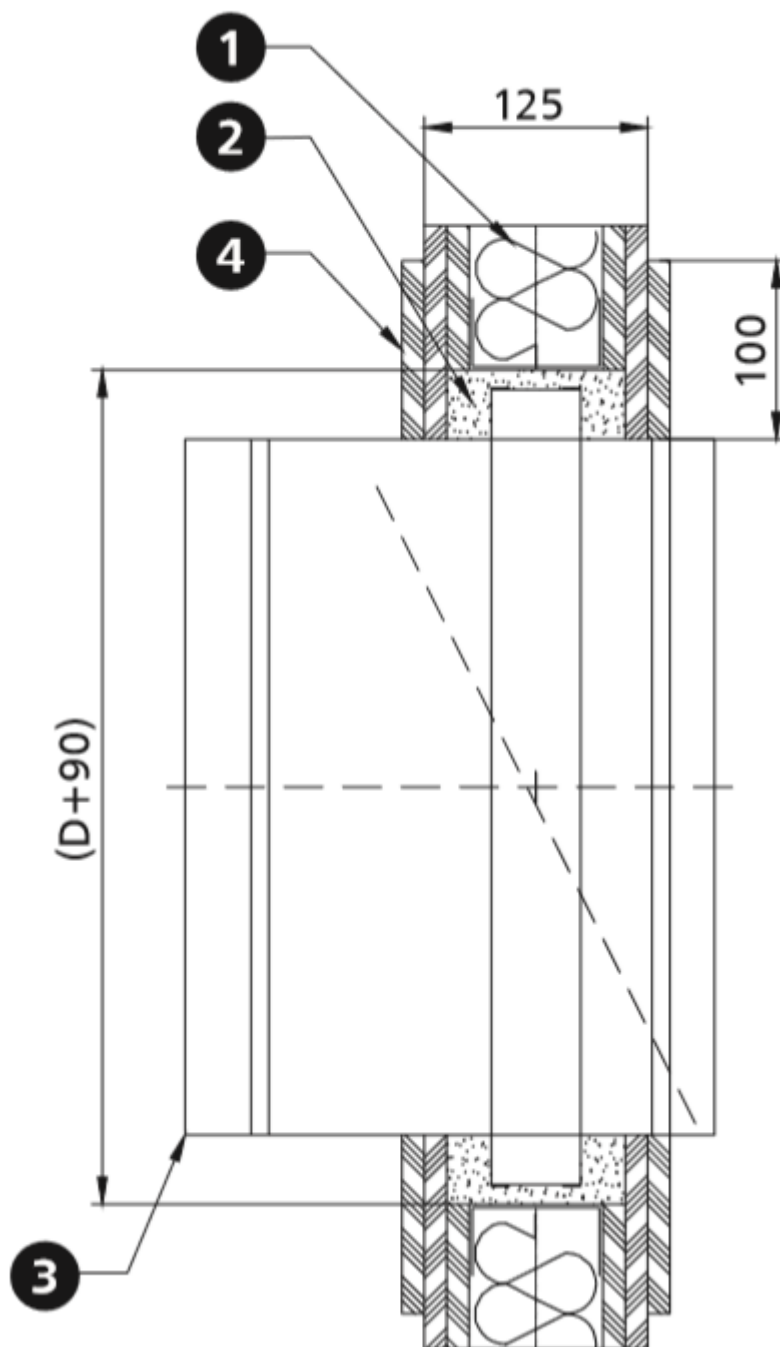


5.3 Sample installation in concrete and masonry walls FID S/S p/P

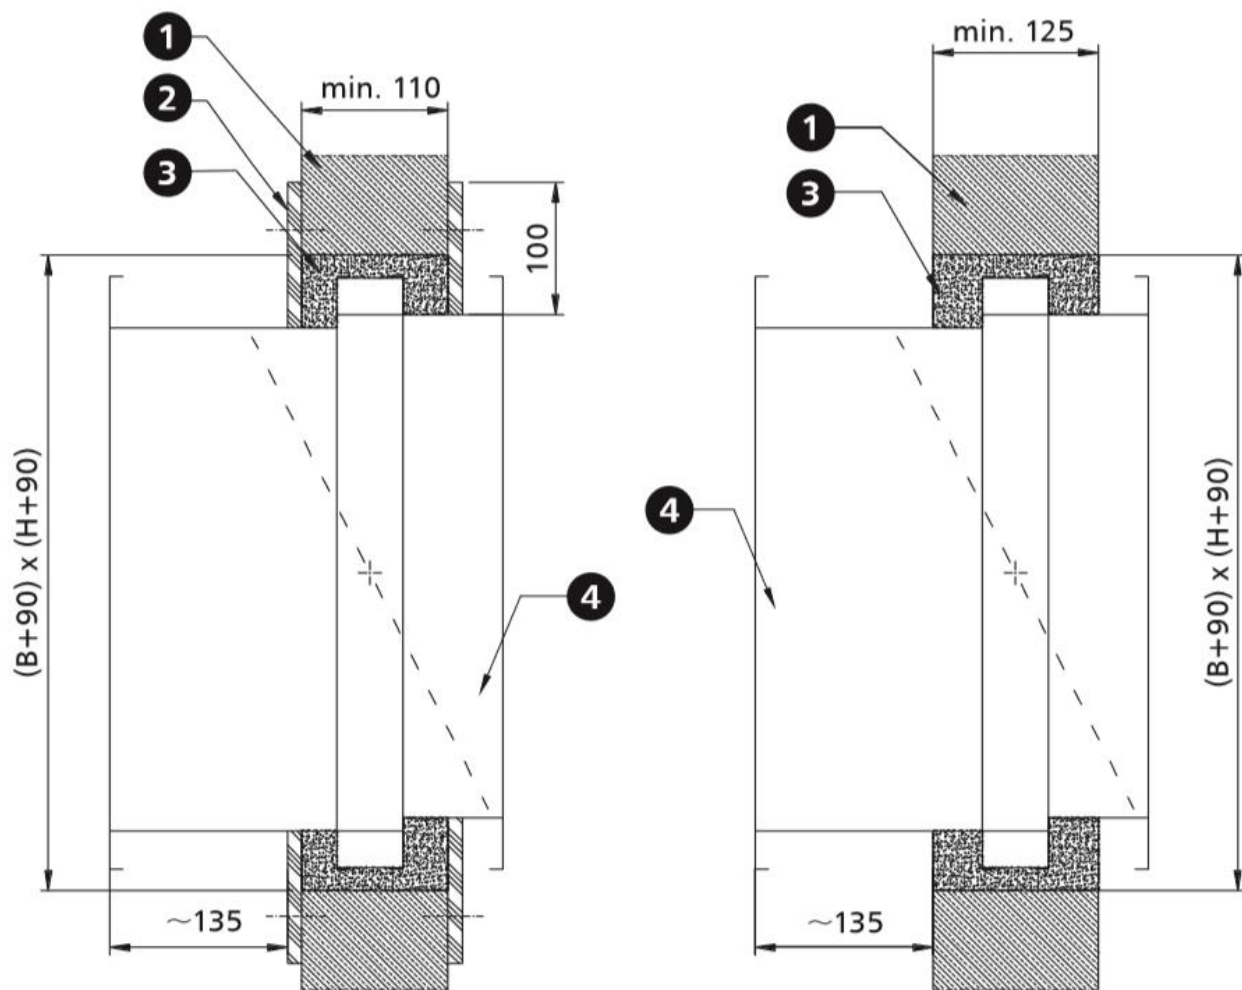

1. Rigid wall – concrete, cellular concrete or bricks
2. Circumferential band of plaster-cardboard panels
3. Sealing – concrete, cement or cement-lime masonry mortar*
4. Fire damper FID S

i It is possible to use a different sealing which ensures the required fire resistance

FID S/S p/O damper

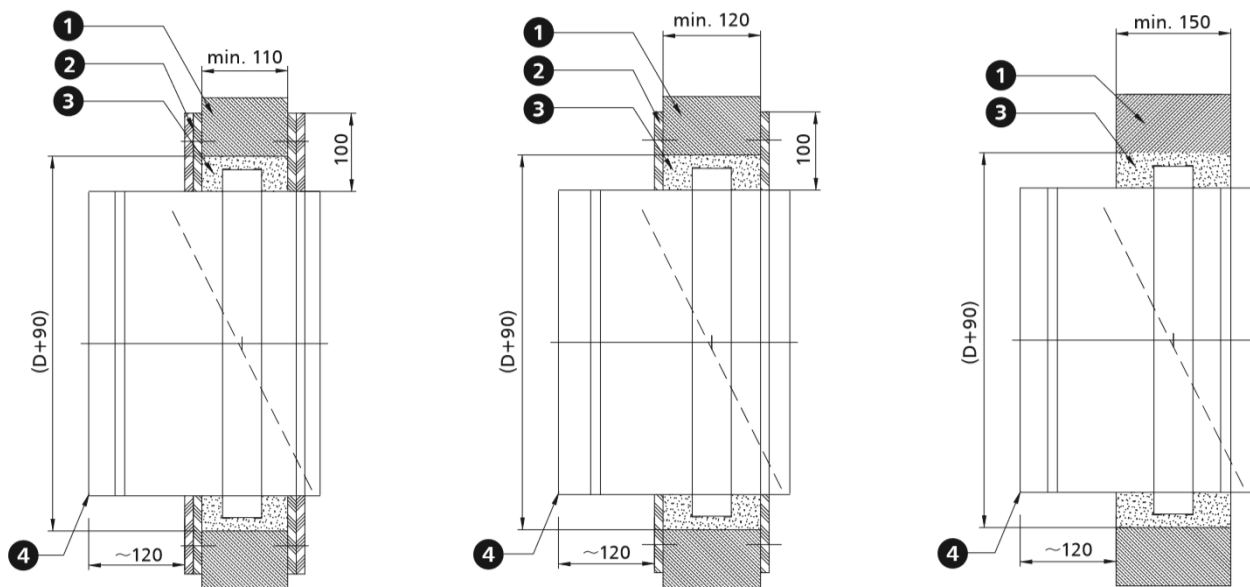





1. Rigid wall - concrete, cellular concrete or bricks
2. Circumferential gypsum board trim
3. Sealing - concrete, cement or cement-lime masonry mortar*
4. Fire damper FID S

i It is possible to use a different sealing which ensures the required fire resistance

5.4 Sample installation in ceilings

FID S/S p/P damper

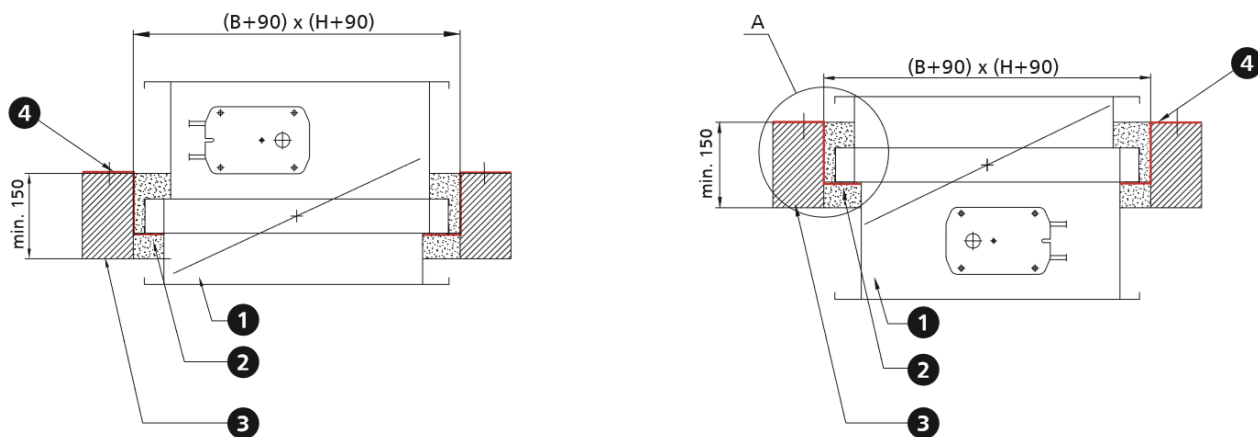

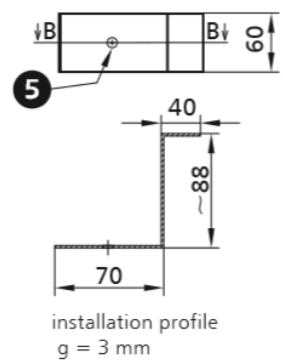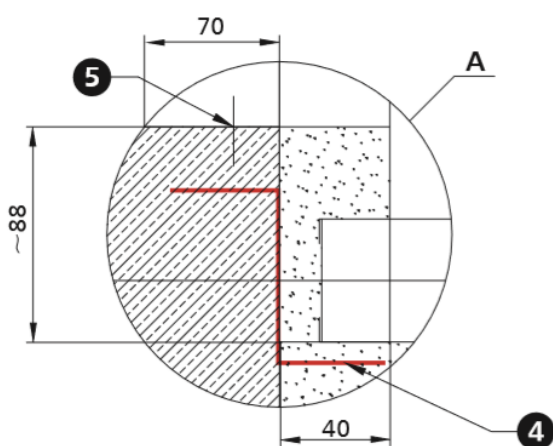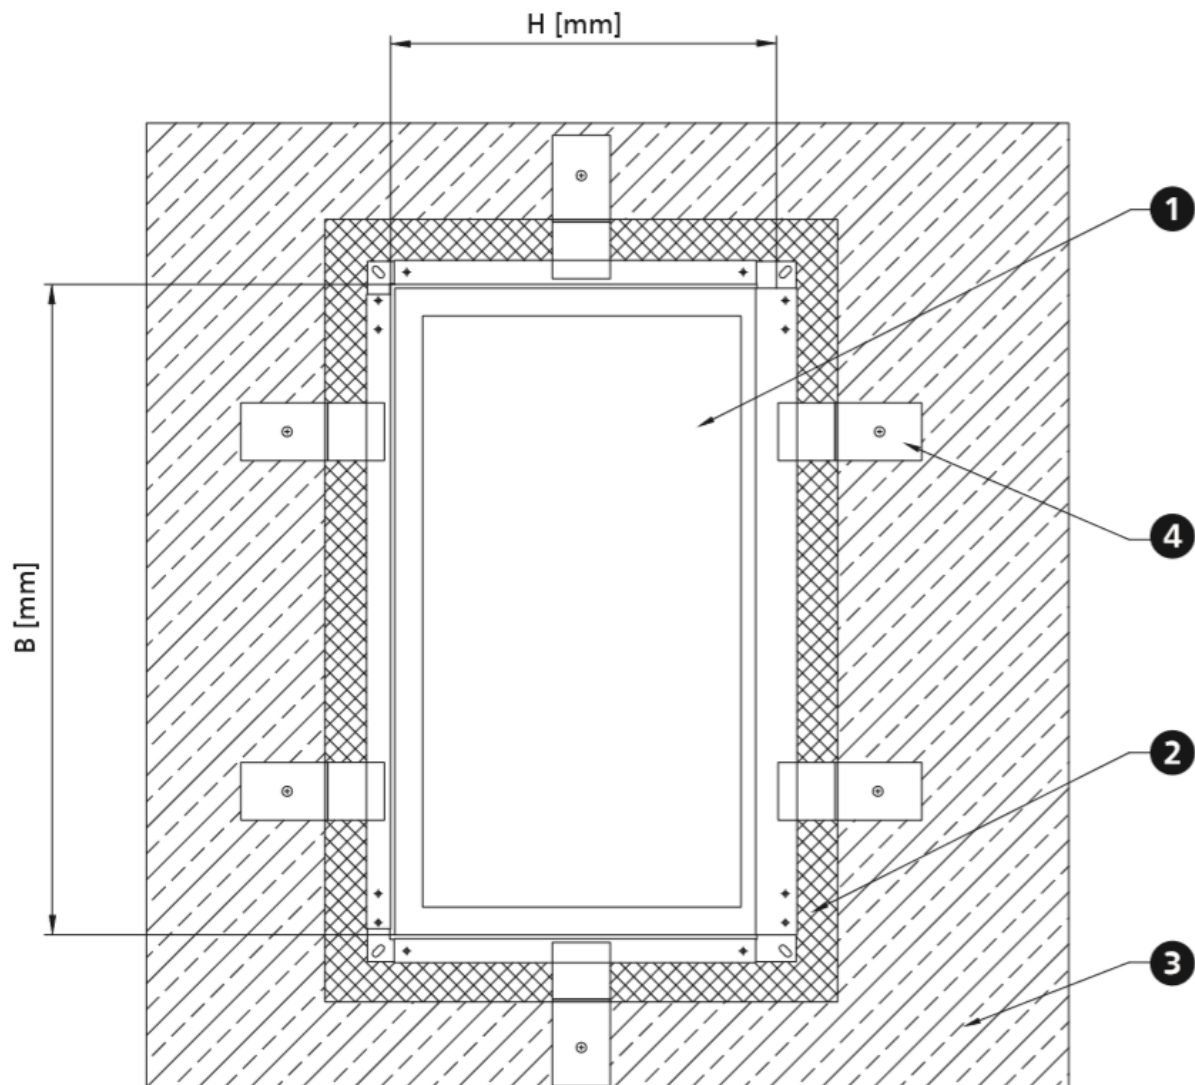



1. Fire damper FID S
2. Sealing – concrete, cement, or cement-lime masonry mortar
3. Ceiling

4. Installation profile $g = 3 \text{ mm}$



5. Steel expansion plug

i It is possible to use a different sealing which ensures the required fire resistance

FID S/S p/O damper

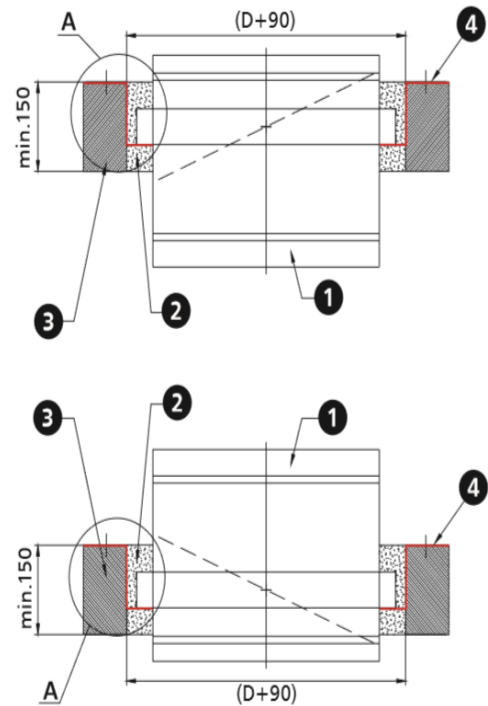
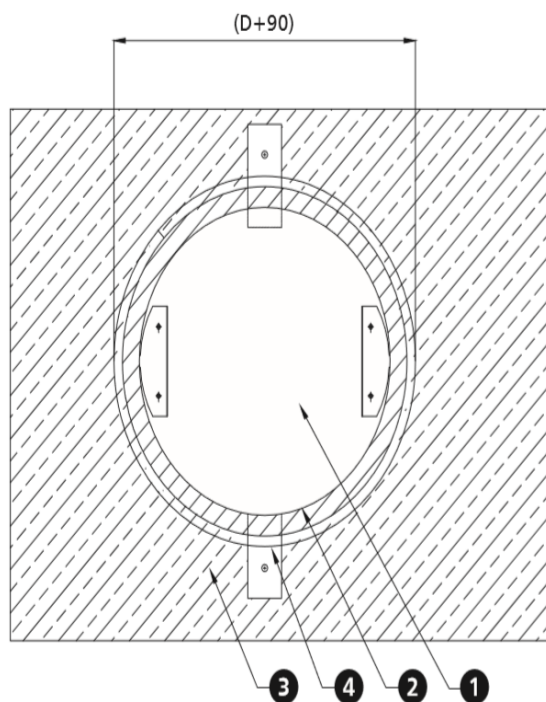


- 1. Fire damper FID S
- 2. Sealing – concrete, cement, or cement-lime masonry mortar*
- 3. Ceiling
- 4. Installation profile $d = 3 \text{ mm}$
- 5. Steel expansion plug

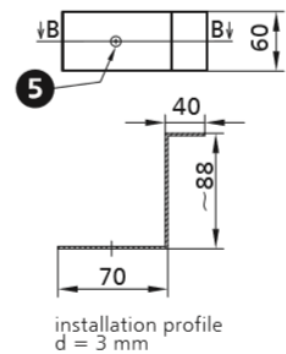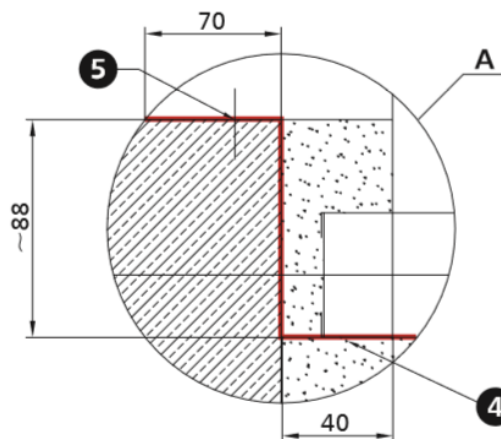

i It is possible to use a different sealing which ensures the required fire resistance

FID S/S p/P

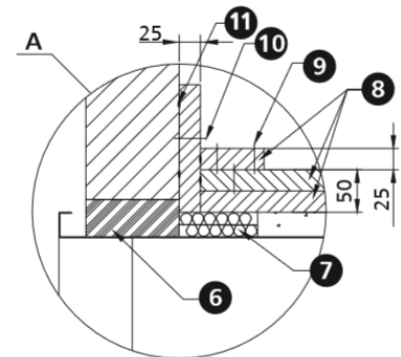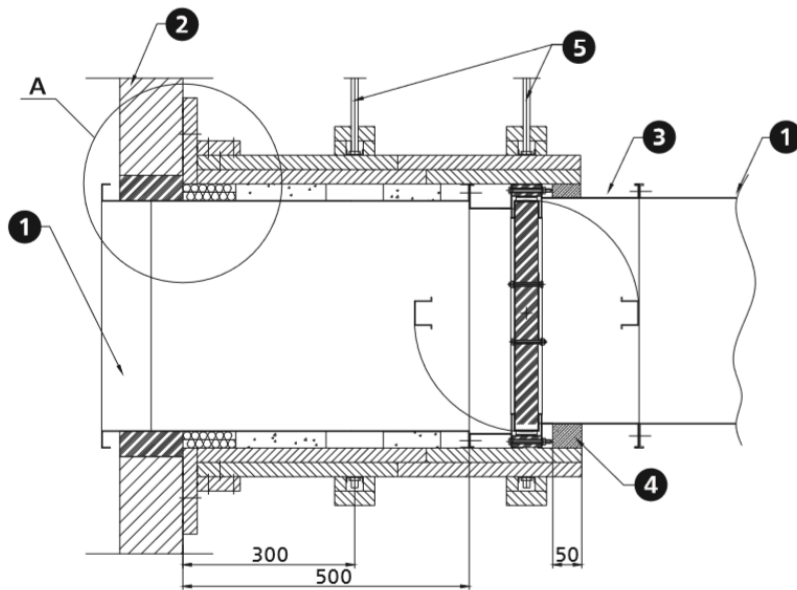

1. Ventilation Duct

2. Rigid wall – concrete, cellular concrete or bricks

3. fire damper FID S

4. Gypsum filling

5. Duct suspension

6. Sealing (cement or cement-lime masonry mortar*)

7. Mineral wool with the density of at least 80 kg/m³, A1 class

8. Ridurit fire retardant board

9. Screws 3.5 x 50 at ~150 mm centres


10. Steel expansion anchor Ø8 x 80 mm

11. Board joints sealed with Conlit Glue

i It is possible to use a different sealing which ensures the required fire resistance

5.5 Sample installation in sets


FID S/S p/P damper

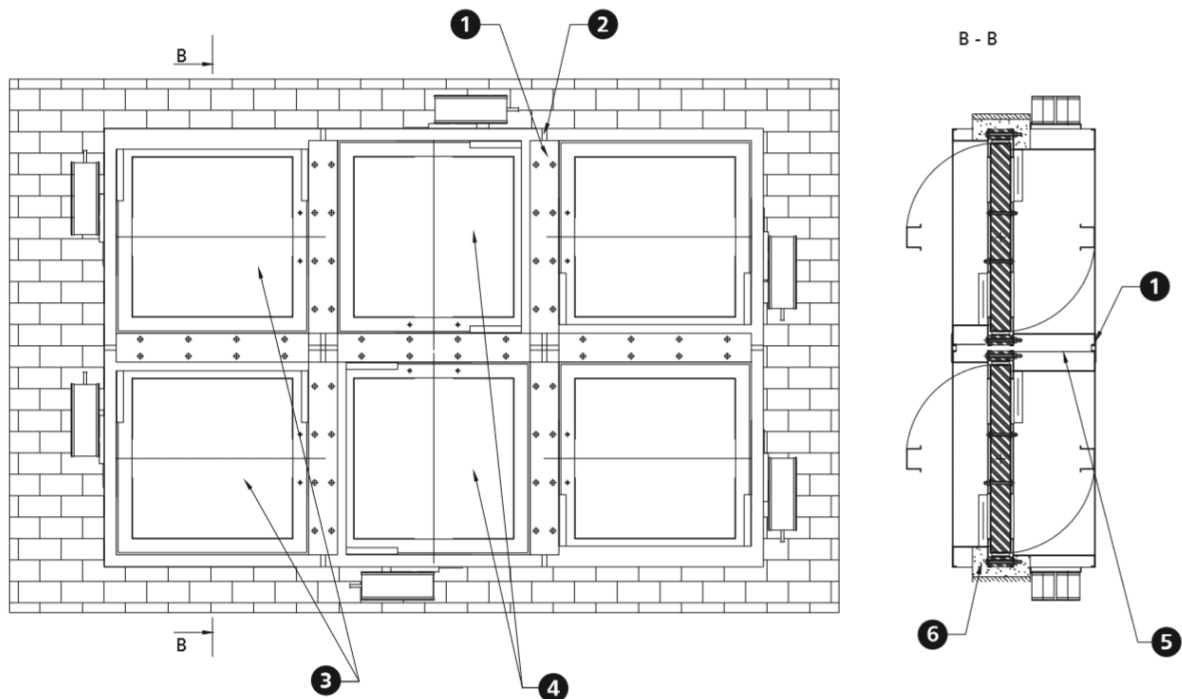

1. Installation flat bar, width 60 mm
2. 10 mm gaps between damper flanges
3. Dampers FID S turned by 180°
4. Dampers FID S turned by 90° and 270°
5. Fire resistant material, e.g. mineral wool with the density of at least 80 kg/m³, A1 class
6. Sealing - concrete, cement or cement-lime masonry mortar*

i It is possible to use a different sealing which ensures the required fire resistance

Distance between systems and partitions

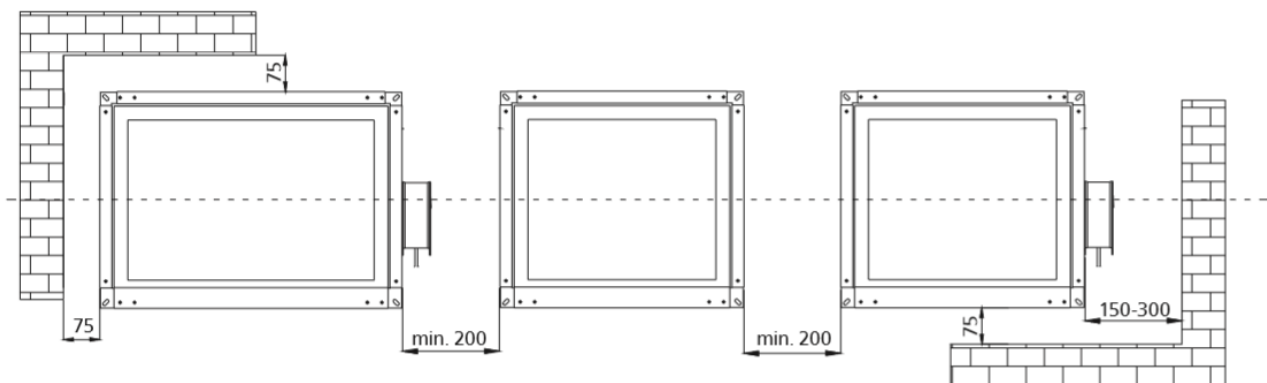

Installation of the damper with a vertical axis of rotation

Such installation must be clearly stated in the draft documentation and mentioned in the order. The dimensions of the damper BxH should be given as to the damper with a horizontal axis of rotation.

6. Technical parameters of FID S/S p/P rectangular dampers

B – nominal width [mm]

v – velocity [m/s]

Q – flow [m³/h]

H – nominal height [mm]

Sk – duct cross section [m²]

Dp – pressure drop [Pa]

Se – damper active cross section [m²]

L_{WA} – damper noise level [dB]

		height H [mm]															
		200					250					300					
		v [m/s]	Sk [m²]	Se [m²]	Q [m³/h]	dp [Pa]	L _{WA} [dB]	Sk [m²]	Se [m²]	Q [m³/h]	dp [Pa]	L _{WA} [dB]	Sk [m²]	Se [m²]	Q [m³/h]	dp [Pa]	L _{WA} [dB]
width B [mm]	200	4	0.040	0.029	420	9	31	0.050	0.039	564	9	31	0.060	0.049	708	8	32
		6			631	21	41			847	19	42			1 063	19	42
		8			841	37	49			1 129	35	49			1 417	33	50
		10			1 051	58	55			1 411	54	55			1 771	52	55
	250	4	0.050	0.037	526	9	31	0.063	0.049	706	9	32	0.075	0.062	886	8	32
		6			788	21	42			1 058	19	43			1 328	18	42
		8			1 051	37	50			1 411	35	50			1 771	31	50
		10			1 314	57	55			1 764	54	56			2 214	49	56
	300	4	0.060	0.044	631	9	32	0.075	0.059	847	8	33	0.090	0.074	1 063	8	32
		6			946	20	43			1 270	19	43			1 594	17	43
		8			1 261	36	50			1 693	34	51			2 125	30	50
		10			1 577	56	56			2 117	53	56			2 657	47	56
	350	4	0.070	0.051	736	9	33	0.088	0.069	988	8	33	0.105	0.086	1 240	7	32
		6			1 104	20	43			1 482	19	44			1 860	16	43
		8			1 472	36	51			1 976	33	51			2 480	29	50
		10			1 840	56	57			2 470	52	57			3 100	45	56
	400	4	0.080	0.058	841	9	33	0.100	0.078	1 129	8	34	0.120	0.098	1 417	7	32
		6			1 261	19	43			1 693	19	44			2 125	15	42
		8			1 682	35	51			2 258	33	52			2 834	27	50
		10			2 102	54	57			2 822	52	57			3 542	42	56
	450	4	0.090	0.066	946	9	33	0.113	0.088	1 270	7	32	0.135	0.111	1 594	7	32
		6			1 419	19	44			1 905	17	43			2 391	15	43
		8			1 892	35	51			2 540	29	51			3 188	27	50
		10			2 365	54	57			3 175	46	56			3 985	42	56
	500	4	0.100	0.073	1 051	9	34	0.125	0.098	1 411	7	32	0.150	0.123	1 771	7	32
		6			1 577	19	44			2 117	16	43			2 657	15	43
		8			2 102	35	52			2 822	28	50			3 542	26	50
		10			2 628	54	58			3 528	44	56			4 428	41	56
	550	4	0.110	0.080	1 156	8	34	0.138	0.108	1 552	7	33	0.165	0.135	1 948	6	33
		6			1 734	19	44			2 328	16	43			2 922	14	43
		8			2 313	34	52			3 105	28	51			3 897	26	51
		10			2 891	53	58			3 881	44	57			4 871	40	56
	600	4	0.120	0.088	1 261	8	34	0.150	0.118	1 693	7	33	0.180	0.148	2 125	6	33
		6			1 892	19	45			2 540	15	43			3 188	14	43
		8			2 523	34	52			3 387	27	51			4 251	26	51
		10			3 154	53	58			4 234	42	56			5 314	40	57
	650	4	0.130	0.095	1 367	8	35	0.163	0.127	1 835	6	32	0.195	0.160	2 303	6	33
		6			2 050	19	45			2 752	14	43			3 454	14	44
		8			2 733	34	53			3 669	26	50			4 605	26	51
		10			3 416	53	59			4 586	40	56			5 756	40	57
	700	4	0.140	0.102	1 472	8	35	0.175	0.137	1 976	6	33	0.210	0.172	2 480	6	34
		6			2 208	19	45			2 964	14	43			3 720	14	44
		8			2 943	33	53			3 951	26	51			4 959	26	52
		10			3 679	52	59			4 939	40	56			6 199	40	57
	800	4	0.160	0.117	1 682	8	35	0.200	0.157	2 258	6	32	0.240	0.197	2 834	6	33
		6			2 523	18	45			3 387	14	43			4 251	14	44
		8			3 364	32	53			4 516	24	51			5 668	24	52
		10			4 205	50	59			5 645	38	56			7 085	38	57
900	4	0.180	0.131	1 892	7	34	0.225	0.176	2 540	6	32	0.270	0.221	3 188	5	32	
	6			2 838	16	44			3 810	13	43			4 782	12	42	
	8			3 784	29	52			5 080	23	50			6 376	21	50	
	10			4 730	45	58			6 350	36	56			7 970	32	56	
1000	4	0.200	0.146	2 102	7	34	0.250	0.196	2 822	6	32	0.300	0.246	3 542	5	32	
	6			3 154	16	45			4 234	13	43			5 314	12	43	
	8			4 205	29	52			5 645	22	50			7 085	21	50	
	10			5 256	45	58			7 056	35	56			8 856	32	56	
1100	4	0.220	0.161	2 313	7	35	0.275	0.216	3 105	5	32	0.330	0.271	3 897	5	33	
	6			3 469	16	45			4 657	12	43			5 845	12	43	
	8			4 625	29	53			6 209	22	50			7 793	21	51	
	10			5 782	45	59			7 762	34	56			9 742	32	56	
1200	4	0.240	0.175	2 523	8	37	0.300	0.235	3 387	5	33	0.360	0.295	4 251	9	40	
	6			3 784	18	47			5 080	12	43			6 376	20	51	
	8			5 046	29	53			6 774	22	51			8 502	36	58	
	10			6 307	45	59			8 467	34	57			10 627	42	60	
1300	4	0.260	0.190	2 733	8	37	0.325	0.255	3 669	5	33	0.390	0.320	4 605	5	33	
	6			4 100	18	47			5 504	12	43			6 908	12	44	
	8			5 466	29	54			7 338	21	51			9 210	21	51	
	10			6 833	45	59			9 173	33	57			11 513	32	57	
1400	4	0.280	0.204	2 943	7	36	0.350	0.274	3 951	5	33	0.420	0.344	4 959	5	34	
	6			4 415	16	46			5 927	12	44			7 439	12	44	
	8			5 887	29	54			7 903	21	51			9 919	21	52	
	10			7 358	45	60			9 878	32	57			12 398	32	58	
1500	4	0.300	0.219	3 154	7	35	0.375	0.294	4 234	5	33	0.450	0.369	5 314	5	34	
	6			4 730	15	46			6 350	12	44			7 970	12	45	
	8			6 307	27	53			8 467	21	51			10 627	21	52	
	10			7 884	42	59			10 584	32	57			13 284	32	58	

B – nominal width [mm]
H – nominal height [mm]

v – velocity [m/s]
Sk – duct cross section [m²]
Se – damper active cross section [m²]

Q – flow [m³/h]
Dp – pressure drop [Pa]
L_{WA} – damper noise level [dB]

		height H [mm]															
		350						400					450				
		v [m/s]	Sk [m²]	Se [m²]	Q [m³/h]	dp [Pa]	L _{WA} [dB]	Sk [m²]	Se [m²]	Q [m³/h]	dp [Pa]	L _{WA} [dB]	Sk [m²]	Se [m²]	Q [m³/h]	dp [Pa]	L _{WA} [dB]
width B [mm]	200	4	0.070	0.059	852	8	32	0.080	0.069	996	7	31	0.090	0.079	1 140	7	31
	6	1 279			18	42	1 495			17	42	1 711			15	41	
	8	1 705			32	50	1 993			29	49	2 281			26	49	
	250	4	0.088	0.074	1 066	7	31	0.100	0.087	1 246	6	29	0.113	0.099	1 426	6	29
	6	1 598			16	42	1 868			13	40	2 138			13	40	
	8	2 131			29	50	2 491			23	47	2 851			22	47	
	300	4	0.105	0.089	1 279	7	32	0.120	0.104	1 495	6	30	0.135	0.119	1 711	5	30
	6	1 918			16	43	2 242			13	41	2 566			12	40	
	8	2 557			28	50	2 989			24	48	3 421			22	48	
	350	4	0.123	0.104	3 197	44	56	0.140	0.121	3 737	37	54	0.158	0.139	4 277	34	54
	6	1 492			7	32	1 744			6	30	1 996			5	30	
	8	2 238			15	42	2 616			13	41	2 994			12	41	
	400	4	0.140	0.118	2 984	26	50	0.160	0.138	3 488	22	48	0.180	0.158	3 992	21	48
	6	3 730			41	56	4 360			35	54	4 990			33	54	
	8	1 705			6	31	1 993			6	31	2 281			5	30	
	450	4	0.158	0.133	2 557	13	41	0.180	0.156	2 989	13	41	0.203	0.178	3 421	12	41
	6	3 410			24	49	3 986			22	49	4 562			21	48	
	8	4 262			37	55	4 982			35	55	5 702			32	54	
	500	4	0.175	0.148	1 918	5	30	0.200	0.173	2 242	5	30	0.225	0.198	2 566	4	29
	6	2 877			12	41	3 363			12	41	3 849			10	40	
	8	3 836			22	48	4 484			21	48	5 132			18	47	
	550	4	0.193	0.163	4 795	34	54	0.220	0.190	5 605	32	54	0.248	0.218	6 415	28	53
	6	2 131			5	31	2 491			5	30	2 851			4	29	
	8	3 197			12	41	3 737			11	40	4 277			9	39	
	600	4	0.210	0.178	4 262	22	49	0.240	0.208	4 982	19	48	0.270	0.238	5 702	17	47
	6	5 328			34	55	6 228			30	54	7 128			26	52	
	8	2 557			5	30	2 740			5	30	3 136			4	29	
	650	4	0.228	0.192	3 836	12	41	0.260	0.225	4 110	11	41	0.293	0.257	4 704	9	40
	6	5 115			21	48	5 481			19	48	6 273			17	47	
	8	6 394			32	54	6 851			30	54	7 841			26	53	
	700	4	0.245	0.207	2 557	5	30	0.28	0.242	2 989	4	28	0.315	0.277	3 421	4	29
	6	3 836			10	40	4 484			8	37	5 132			9	40	
	8	5 115			19	48	5 979			14	45	6 843			17	47	
	800	4	0.280	0.237	6 394	29	53	0.32	0.277	7 474	27	53	0.360	0.317	8 554	26	53
	6	2 771			5	30	3 239			4	30	3 707			4	30	
	8	4 156			10	40	4 858			10	40	5 560			9	40	
	900	4	0.315	0.266	5 541	19	48	0.360	0.311	6 477	17	48	0.405	0.356	7 413	17	48
	6	6 926			29	54	8 096			27	53	9 266			26	54	
	8	2 984			5	30	3 488			4	30	3 992			4	30	
	1000	4	0.350	0.296	4 476	10	41	0.400	0.346	5 232	10	40	0.450	0.396	5 988	9	40
	6	5 967			19	48	6 975			17	48	7 983			16	48	
	8	7 459			29	54	8 719			27	54	9 979			25	53	
	1100	4	0.385	0.326	3 410	4	30	0.440	0.381	3 986	4	30	0.495	0.436	4 562	4	29
	6	5 115			10	41	5 979			9	41	6 843			9	40	
	8	6 820			18	48	7 972			17	48	9 124			16	47	
	1200	4	0.420	0.355	8 525	28	54	0.480	0.415	9 965	26	54	0.540	0.475	11 405	25	53
	6	3 836			4	31	4 484			6	35	5 132			4	29	
	8	5 754			10	41	6 726			12	44	7 698			9	40	
	1300	4	0.455	0.385	7 672	18	49	0.520	0.450	8 968	26	54	0.585	0.515	10 264	16	47
	6	9 590			28	55	11 210			33.4	58	12 830			25	53	
	8	4 262			4	30	4 982			4	31	5 702			4	29	
	1400	4	0.490	0.414	6 394	9	41	0.560	0.484	7 474	9	42	0.630	0.554	8 554	9	40
	6	8 525			17	48	9 965			17	49	11 405			16	47	
	8	10 656			26	54	12 456			26	55	14 256			25	53	
	1500	4	0.525	0.444	4 689	4	32	0.600	0.519	5 481	4	31	0.675	0.594	6 273	4	29
	6	7 033			10	42	8 221			9	42	9 409			9	39	
	8	9 377			18	50	10 961			17	49	12 545			15	47	
					11 722	28	56			13 702	26	55			15 682	24	53
					5 115	4	31			5 979	4	31			6 843	4	29
					7 672	9	41			8 968	9	42			10 264	9	39
					10 230	16	49			11 958	16	49			13 686	15	47
					12 787	25	54			14 947	25	55			17 107	24	53
					5 541	4	32			6 477	4	32			7 413	4	28
					8 312	10	43			9 716	9	42			11 120	8	39
					11 082	17	50			12 954	16	50			14 826	15	46
					13 853	27	56			16 193	25	55			18 533	23	52
					5 967	4	32			6 975	4	32			7 983	4	28
					8 951	10	43			10 463	9	43			11 975	8	39
					11 935	17	50			13 951	16	50			15 967	15	46
					14 918	27	56			17 438	25	56			19 958	23	52
					6 394	4	32			7 474	4	32			8 554	4	28
					9 590	9	43			11 210	9	43			12 830	8	38
					12 787	17	50			14 947	16	50			17 107	14	46
				15 984	26	56			18 684	25	56			21 384	22	51	

B – nominal width [mm]

H – nominal height [mm]

v – velocity [m/s]

Sk – duct cross section [m²]

Se – damper active cross section [m²]

Q – flow [m³/h]

Δp – pressure drop [Pa]

L_{WA} – damper noise level [dB]

		v [m/s]	height H [mm]														
			500					550					600				
			Sk [m²]	Se [m²]	Q [m³/h]	dp [Pa]	L _{WA} [dB]	Sk [m²]	Se [m²]	Q [m³/h]	dp [Pa]	L _{WA} [dB]	Sk [m²]	Se [m²]	Q [m³/h]	dp [Pa]	L _{WA} [dB]
width B [mm]	200	4	0.100	0.089	1 284	6	29	0.110	0.099	1 428	5	29	0.120	0.109	1 572	5	29
	6	1 927			13	40	2 143			12	39	2 359			12	39	
	8	2 569			22	47	2 857			21	47	3 145			21	47	
	10	3 211			35	53	3 571			33	53	3 931			32	53	
	250	4	0.125	0.112	1 606	6	30	0.138	0.124	1 786	5	30	0.150	0.137	1 966	5	30
	6	2 408			13	41	2 678			12	40	2 948			12	40	
	8	3 211			22	48	3 571			21	48	3 931			21	48	
	10	4 014			35	54	4 464			33	53	4 914			32	54	
	300	4	0.150	0.134	1 927	5	30	0.165	0.149	2 143	5	30	0.180	0.164	2 359	5	30
	6	2 890			12	41	3 214			12	41	3 538			11	40	
	8	3 853			21	48	4 285			21	48	4 717			19	48	
	10	4 817			33	54	5 357			32	54	5 897			30	53	
	350	4	0.175	0.156	2 248	5	30	0.193	0.174	2 500	5	31	0.210	0.191	2 752	5	30
	6	3 372			12	41	3 750			12	41	4 128			10	40	
	8	4 496			21	48	5 000			21	49	5 504			19	48	
	10	5 620			32	54	6 250			32	55	6 880			29	54	
	400	4	0.200	0.178	2 569	5	30	0.220	0.198	2 857	5	30	0.240	0.218	3 145	4	30
	6	3 853			11	41	4 285			10	41	4 717			10	41	
	8	5 138			19	48	5 714			19	48	6 290			18	48	
	10	6 422			30	54	7 142			29	54	7 862			28	54	
	450	4	0.225	0.201	2 890	4	29	0.248	0.223	3 214	4	29	0.270	0.246	3 538	4	30
	6	4 335			9	39	4 821			9	40	5 307			9	40	
	8	5 780			17	47	6 428			17	47	7 076			17	48	
	10	7 225			26	52	8 035			26	53	8 845			26	53	
	500	4	0.250	0.223	3 211	4	27	0.275	0.248	3 571	4	29	0.300	0.273	3 931	4	29
	6	4 817			8	38	5 357			9	39	5 897			9	39	
	8	6 422			14	45	7 142			15	47	7 862			15	47	
	10	8 028			20	50	8 928			24	52	9 828			24	53	
	550	4	0.275	0.245	3 853	3	27	0.303	0.273	4 285	4	28	0.330	0.300	4 717	4	28
	6	5 780			8	37	6 428			8	38	7 076			8	39	
	8	7 707			13	45	8 571			14	46	9 435			14	46	
	10	9 634			21	51	10 714			22	52	11 794			22	52	
	600	4	0.300	0.268	3 853	3	27	0.330	0.298	4 285	3	28	0.360	0.328	4 717	3	28
	6	5 780			8	38	6 428			8	38	7 076			8	39	
	8	7 707			13	45	8 571			13	46	9 435			13	46	
	10	9 634			21	51	10 714			21	51	11 794			21	52	
	650	4	0.325	0.290	4 175	4	31	0.358	0.322	4 643	3	28	0.390	0.355	5 111	3	28
	6	6 262			10	41	6 964			8	38	7 666			8	39	
	8	8 349			17	49	9 285			13	46	10 221			13	46	
	10	10 436			21	51	11 606			21	52	12 776			21	52	
	700	4	0.350	0.312	4 496	3	28	0.385	0.347	5 000	3	28	0.420	0.382	5 504	3	29
	6	6 744			8	38	7 500			8	39	8 256			8	39	
	8	8 991			13	46	9 999			13	46	11 007			13	47	
	10	11 239			21	52	12 499			21	52	13 759			21	52	
	800	4	0.400	0.357	5 138	3	28	0.440	0.397	5 714	3	29	0.480	0.437	6 290	3	29
	6	7 707			8	39	8 571			8	39	9 435			8	40	
	8	10 276			13	46	11 428			13	47	12 580			13	47	
	10	12 845			21	52	14 285			21	53	15 725			21	53	
	900	4	0.450	0.401	5 780	3	28	0.495	0.446	6 428	3	29	0.540	0.491	7 076	3	30
	6	8 670			8	39	9 642			8	40	10 614			8	38	
	8	11 560			13	46	12 856			13	47	14 152			13	45	
	10	14 450			21	52	16 070			21	53	17 690			21	51	
	1000	4	0.500	0.446	6 422	3	28	0.550	0.496	6 428	3	30	0.600	0.546	7 862	3	30
	6	9 634			8	39	9 642			8	40	11 794			8	41	
	8	12 845			13	46	12 856			13	48	15 725			13	48	
	10	16 056			21	52	16 070			21	54	19 656			21	54	
	1100	4	0.550	0.491	7 065	4	29	0.605	0.546	7 857	4	31	0.660	0.601	8 649	3	31
	6	10 597			8	39	11 785			8	41	12 973			8	41	
	8	14 129			14	47	15 713			14	49	17 297			13	49	
	10	17 662			22	53	19 642			22	55	21 622			21	54	
	1200	4	0.600	0.535	7 707	3	27	0.660	0.595	8 571	3	30	0.720	0.655	9 435	3	30
	6	11 560			7	38	12 856			7	40	14 152			7	40	
	8	15 414			13	45	17 142			13	48	18 870			12	48	
	10	19 267			20	51	21 427			20	54	23 587			19	54	
	1300	4	0.650	0.580	8 349	3	27	0.715	0.645	9 285	3	30	0.780	0.710	10 221	3	30
	6	12 524			7	38	13 928			7	41	15 332			7	41	
	8	16 698			13	45	18 570			13	48	20 442			12	48	
	10	20 873			20	51	23 213			20	54	25 553			19	54	
	1400	4	0.700	0.624	8 991	3	27	0.770	0.694	9 999	3	31	0.840	0.764	11 007	3	30
	6	13 487			7	38	14 999			7	41	16 511			7	41	
	8	17 983			13	45	19 999			13	49	22 015			12	48	
	10	22 478			20	51	24 998			20	54	27 518			19	54	
1500	4	0.750	0.669	9 634	3	27	0.825	0.744	10 714	3	31	0.900	0.819	11 794	3	31	
6	14 450			7	38	16 070			7	41	17 690			7	41		
8	19 267			13	45	21 427			13	49	23 587			12	49		
10	24 084			20	51	26 784			20	55	29 484			19	54		

B – nominal width [mm]

H – nominal height [mm]

v – velocity [m/s]

Sk – duct cross section [m²]

Se – damper active cross section [m²]

Q – flow [m³/h]

Dp – pressure drop [Pa]

L_{WA} – damper noise level [dB]

		height H [mm]																
		650					700					750						
		v [m/s]	Sk [m²]	Se [m²]	Q [m³/h]	dp [Pa]	L _{WA} [dB]	Sk [m²]	Se [m²]	Q [m³/h]	dp [Pa]	L _{WA} [dB]	Sk [m²]	Se [m²]	Q [m³/h]	dp [Pa]	L _{WA} [dB]	
width B [mm]	200	4	0.130	0.119	1 716	5	0.140	0.129	1 860	5	0.150	0.139		2 004	5	29		
		6			2 575	11			39	2 791				11	40	3 007	11	40
		8			3 433	20			47	3 721				20	47	4 009	20	47
		10			4 291	31			53	4 651				31	53	5 011	31	53
	250	4	0.163	0.149	2 146	5	0.175	0.162	2 326	5	0.188	0.174		2 506	5	30		
		6			3 218	11			40	3 488				11	41	3 758	11	41
		8			4 291	20			48	4 651				20	48	5 011	20	48
		10			5 364	31			53	5 814				31	54	6 264	31	54
	300	4	0.195	0.179	2 575	5	0.210	0.194	2 791	4	0.225	0.209		3 007	4	30		
		6			3 862	10			40	4 186				10	40	4 510	10	40
		8			5 149	19			48	5 581				18	47	6 013	18	48
		10			6 437	29			53	6 977				28	53	7 517	28	54
	350	4	0.228	0.209	3 004	4	0.245	0.226	3 256	4	0.263	0.244		3 508	4	30		
		6			4 506	10			40	4 884				10	40	5 262	10	41
		8			6 008	18			48	6 512				17	48	7 016	17	48
		10			7 510	28			54	8 140				27	53	8 770	27	54
	400	4	0.260	0.238	3 433	4	0.280	0.258	3 721	4	0.300	0.278		4 009	4	31		
		6			5 149	10			41	5 581				10	41	6 013	10	41
		8			6 866	18			48	7 442				17	48	8 018	17	49
		10			8 582	28			54	9 302				27	54	10 022	27	54
	450	4	0.293	0.268	3 862	4	0.315	0.291	4 186	4	0.338	0.313		4 510	4	30		
		6			5 793	9			40	6 279				9	40	6 765	9	40
		8			7 724	17			48	8 372				15	47	9 020	15	48
		10			9 655	26			54	10 465				24	53	11 275	24	53
	500	4	0.325	0.298	4 291	4	0.350	0.323	4 651	4	0.375	0.348		5 011	4	29		
		6			6 437	9			40	6 977				8	40	7 517	8	40
		8			8 582	15			47	9 302				15	47	10 022	15	47
		10			10 728	24			53	11 628				23	53	12 528	23	53
	550	4	0.358	0.328	5 149	4	0.385	0.355	5 516	4	0.413	0.383		5 912	4	29		
		6			7 724	8			39	8 372				8	39	9 020	8	40
		8			10 299	14			47	11 233				14	47	12 125	14	47
		10			12 874	22			52	13 791				22	53	14 683	22	53
	600	4	0.390	0.358	5 149	3	0.420	0.388	5 581	3	0.450	0.418		6 013	3	29		
		6			7 724	8			39	8 372				8	39	9 020	8	40
		8			10 299	13			46	11 163				13	47	12 027	13	47
		10			12 874	21			52	13 954				21	53	15 034	21	53
	650	4	0.423	0.387	5 579	3	0.455	0.420	6 047	3	0.488	0.452		6 515	3	28		
		6			8 368	7			39	9 070				7	39	9 772	7	39
		8			11 157	13			46	12 093				13	46	13 029	12	46
		10			13 946	20			52	15 116				20	52	16 286	19	52
	700	4	0.455	0.417	6 008	3	0.490	0.452	6 512	3	0.525	0.487		7 016	3	28		
		6			9 012	7			39	9 768				7	39	10 524	7	39
		8			12 015	13			46	13 023				13	47	14 031	12	46
		10			15 019	20			52	16 279				20	53	17 539	19	52
	800	4	0.520	0.477	6 866	3	0.560	0.517	7 442	4	0.600	0.557		8 018	3	28		
		6			10 299	6			38	11 163				7	37	12 027	6	39
		8			13 732	12			45	14 884				11	43	16 036	12	46
		10			17 165	18			51	18 605				16	47	20 045	18	52
900	4	0.585	0.536	7 724	3	0.630	0.581	8 372	3	0.675	0.626		9 020	3	27			
	6			11 586	6			36	12 558				6	37	13 530	6	38	
	8			15 448	10			44	16 744				10	45	18 040	10	45	
	10			19 310	16			50	20 930				16	51	22 550	16	51	
1000	4	0.650	0.596	8 582	3	0.700	0.646	9 302	3	0.750	0.696		10 022	3	28			
	6			12 874	6			36	13 954				6	38	15 034	6	38	
	8			17 165	10			44	18 605				10	45	20 045	10	46	
	10			21 456	16			50	23 256				16	51	25 056	16	52	
1100	4	0.715	0.656	9 441	3	0.770	0.711	10 233	3	0.825	0.766		11 025	3	28			
	6			14 161	8			40	15 349				8	42	16 537	8	39	
	8			18 881	13			47	20 465				13	49	22 049	10	46	
	10			23 602	21			53	25 582				21	55	27 562	16	52	
1200	4	0.780	0.715	10 299	3	0.840	0.775	11 163	3	0.900	0.835		12 027	2	28			
	6			15 448	7			39	16 744				7	41	18 040	5	38	
	8			20 598	12			46	22 326				12	48	24 054	10	46	
	10			25 747	19			52	27 907				19	54	30 067	15	52	
1300	4	0.845	0.775	11 157	3	0.910	0.840	12 093	3	0.975	0.905		13 029	2	28			
	6			16 736	7			39	18 140				7	41	19 544	5	39	
	8			22 314	12			46	24 186				12	49	26 058	10	46	
	10			27 893	19			52	30 233				19	55	32 573	15	52	
1400	4	0.910	0.834	12 015	3	0.980	0.904	13 023	3	1.050	0.974		14 031	2	28			
	6			18 023	7			39	19 535				7	42	21 047	5	39	
	8			24 031	12			46	26 047				12	49	28 063	10	46	
	10			30 038	19			52	32 558				19	55	35 078	15	52	
1500	4	0.975	0.894	12 874	3	1.050	0.969	13 954	3	1.125	1.044		15 034	3	30			
	6			19 310	7			39	20 930				7	42	22 550	6	41	
	8			25 747	12			46	27 907				12	49	30 067	11	48	
	10			32 184	19			52	34 884				19	55	37 584	17	54	

B – nominal width [mm]
H – nominal height [mm]

v – velocity [m/s]
Sk – duct cross section [m²]
Se – damper active cross section [m²]

Q – flow [m³/h]
Dp – pressure drop [Pa]
L_{WA} – damper noise level [dB]

		height H [mm]															
		800					850					900					
		v [m/s]	Sk [m²]	Se [m²]	Q [m³/h]	dp [Pa]	L _{WA} [dB]	Sk [m²]	Se [m²]	Q [m³/h]	dp [Pa]	L _{WA} [dB]	Sk [m²]	Se [m²]	Q [m³/h]	dp [Pa]	L _{WA} [dB]
width B [mm]	200	4	0.160	0.149	2 148	5	29	0.170	0.159	2 292	5	29	0.180	0.169	2 436	5	30
		6			3 223	11	40			3 439	11	40			3 655	11	40
		8			4 297	19	47			4 585	19	48			4 873	19	48
		10			5 371	30	53			5 731	30	53			6 091	30	54
	250	4	0.200	0.187	2 686	5	30	0.213	0.199	2 866	5	30	0.225	0.212	3 046	5	31
		6			4 028	11	41			4 298	11	41			4 568	11	41
		8			5 371	19	48			5 731	19	49			6 091	19	49
		10			6 714	30	54			7 164	30	54			7 614	30	55
	300	4	0.240	0.224	3 223	4	30	0.255	0.239	3 439	4	30	0.270	0.254	3 655	4	30
		6			4 834	10	41			5 158	10	41			5 482	10	41
		8			6 445	18	48			6 877	18	48			7 309	17	48
		10			8 057	28	54			8 597	28	54			9 137	27	54
	350	4	0.280	0.261	3 760	4	30	0.298	0.279	4 012	4	31	0.315	0.296	4 264	4	30
		6			5 640	10	41			6 018	10	41			6 396	9	41
		8			7 520	17	48			8 024	17	49			8 528	17	48
		10			9 400	27	54			10 030	27	54			10 660	26	54
	400	4	0.320	0.298	4 297	4	31	0.340	0.318	4 585	4	31	0.360	0.338	4 873	4	30
		6			6 445	10	41			6 877	10	42			7 309	9	41
		8			8 594	17	49			9 170	17	49			9 746	16	48
		10			10 742	27	55			11 462	27	55			12 182	25	54
	450	4	0.360	0.336	4 834	4	29	0.383	0.358	5 158	4	29	0.405	0.381	5 482	3	29
		6			7 251	8	39			7 737	8	40			8 223	8	39
		8			9 668	14	47			10 316	14	47			10 964	13	47
		10			12 085	22	53			12 895	22	53			13 705	21	52
	500	4	0.400	0.373	5 371	4	29	0.425	0.398	5 731	4	29	0.450	0.423	6 091	3	29
		6			8 057	8	40			8 597	8	40			9 137	8	40
		8			10 742	14	47			11 462	14	47			12 182	13	47
		10			13 428	22	53			14 328	22	53			15 228	21	53
	550	4	0.440	0.410	5 908	3	29	0.468	0.438	6 304	3	29	0.495	0.465	6 700	3	29
		6			8 862	8	40			9 456	8	40			10 050	7	39
		8			11 817	13	47			12 609	13	47			13 401	13	47
		10			14 771	21	53			15 761	21	53			16 751	20	53
	600	4	0.480	0.448	6 445	3	29	0.510	0.478	6 877	3	29	0.540	0.508	7 309	3	29
		6			9 668	7	39			10 316	7	40			10 964	7	39
		8			12 891	13	47			13 755	13	47			14 619	12	47
		10			16 114	20	53			17 194	20	53			18 274	19	52
	650	4	0.520	0.485	6 983	3	28	0.553	0.517	7 451	3	29	0.585	0.550	7 919	3	29
		6			10 474	7	39			11 176	7	39			11 878	7	39
		8			13 965	12	46			14 901	12	47			15 837	12	47
		10			17 456	19	52			18 626	19	53			19 796	19	53
	700	4	0.560	0.522	7 520	3	28	0.595	0.557	8 024	3	28	0.630	0.592	8 528	3	27
		6			11 280	6	39			12 036	6	39			12 792	6	38
		8			15 039	12	46			16 047	12	46			17 055	10	45
		10			18 799	18	52			20 059	18	52			21 319	16	51
	800	4	0.640	0.597	8 594	3	27	0.680	0.637	9 170	3	27	0.720	0.677	9 746	3	28
		6			12 891	6	38			13 755	6	38			14 619	6	38
		8			17 188	10	45			18 340	10	45			19 492	10	46
		10			21 485	16	51			22 925	16	51			24 365	16	51
900	4	0.720	0.671	9 668	3	28	0.765	0.716	10 316	3	28	0.810	0.761	10 964	3	28	
	6			14 502	6	38			15 474	6	38			16 446	6	39	
	8			19 336	10	46			20 632	10	46			21 928	10	46	
	10			24 170	16	51			25 790	16	52			27 410	16	52	
1000	4	0.800	0.746	10 742	3	28	0.850	0.796	11 462	3	28	0.900	0.846	12 182	3	29	
	6			16 114	6	39			17 194	6	39			18 274	6	39	
	8			21 485	10	46			22 925	10	46			24 365	10	47	
	10			26 856	16	52			28 656	16	52			30 456	16	52	
1100	4	0.880	0.821	11 817	3	28	0.935	0.876	12 609	3	29	0.990	0.931	13 401	3	29	
	6			17 725	6	39			18 913	6	39			20 101	6	40	
	8			23 633	10	46			25 217	10	47			26 801	10	47	
	10			29 542	16	52			31 522	16	53			33 502	16	53	
1200	4	0.960	0.895	12 891	2	28	1.020	0.955	13 755	2	28	1.080	1.015	14 619	2	28	
	6			19 336	5	39			20 632	5	39			21 928	5	38	
	8			25 782	10	46			27 510	10	46			29 238	9	46	
	10			32 227	15	52			34 387	15	52			36 547	14	51	
1300	4	1.040	0.970	13 965	2	28	1.105	1.035	14 901	2	29	1.170	1.100	15 837	2	29	
	6			20 948	5	39			22 352	5	39			23 756	5	39	
	8			27 930	10	46			29 802	10	47			31 674	10	47	
	10			34 913	15	52			37 253	15	52			39 593	15	53	
1400	4	1.120	1.044	15 039	2	29	1.190	1.114	16 047	3	30	1.260	1.184	17 055	2	28	
	6			22 559	5	39			24 071	6	40			25 583	5	39	
	8			30 079	10	47			32 095	10	48			34 111	9	46	
	10			37 598	15	52			40 118	16	54			42 638	14	52	
1500	4	1.200	1.119	16 114	3	31	1.275	1.194	17 194	3	30	1.350	1.269	18 274	2	29	
	6			24 170	6	41			25 790	6	41			27 410	5	40	
	8			32 227	11	49			34 387	10	48			36 547	10	48	
	10			40 284	17	54			42 984	16	54			45 684	15	53	

B – nominal width [mm]

v – velocity [m/s]

Q – flow [m³/h]

H – nominal height [mm]

Sk – duct cross section [m²]

Dp – pressure drop [Pa]

Se – damper active cross section [m²]

L_{WA} – damper noise level [dB]

		height H [mm]															
		1000					1100					1200					
		v [m/s]	Sk [m²]	Se [m²]	Q [m³/h]	dp [Pa]	L _{WA} [dB]	Sk [m²]	Se [m²]	Q [m³/h]	dp [Pa]	L _{WA} [dB]	Sk [m²]	Se [m²]	Q [m³/h]	dp [Pa]	L _{WA} [dB]
width B [mm]	200	4	0.200	0.189	2 724	5	30	0.220	0.209	3 012	5	30	0.240	0.229	3 300	4	30
	6	4 087			10	40	4 519			10	41	4 951			10	41	
	8	5 449			19	48	6 025			19	48	6 601			18	48	
	10	6 811			29	54	7 531			29	54	8 251			28	54	
	250	4	0.250	0.237	3 406	5	31	0.275	0.262	3 766	4	31	0.300	0.287	4 126	4	31
	6	5 108			10	41	5 648			10	41	6 188			10	41	
	8	6 811			19	49	7 531			18	49	8 251			17	49	
	10	8 514			29	55	9 414			28	55	10 314			27	55	
	300	4	0.300	0.284	4 087	4	31	0.330	0.314	4 519	4	31	0.360	0.344	4 951	4	31
	6	6 130			10	41	6 778			10	42	7 426			9	42	
	8	8 173			17	49	9 037			17	49	9 901			17	49	
	10	10 217			27	54	11 297			27	55	12 377			26	55	
	350	4	0.350	0.331	4 768	4	31	0.385	0.366	5 272	4	31	0.420	0.401	5 776	4	31
	6	7 152			9	41	7 908			9	42	8 664			9	41	
	8	9 536			17	49	10 544			17	49	11 552			15	49	
	10	11 920			26	55	13 180			26	55	14 440			24	54	
	400	4	0.400	0.378	5 449	3	28	0.440	0.418	6 025	3	28	0.480	0.458	6 601	3	29
	6	8 173			7	39	9 037			7	39	9 901			7	39	
	8	10 898			13	46	12 050			13	46	13 202			13	47	
	10	13 622			20	52	15 062			20	52	16 502			20	53	
	450	4	0.450	0.426	6 130	3	28	0.495	0.471	6 778	3	29	0.540	0.516	7 426	3	29
	6	9 195			7	39	10 167			7	39	11 139			7	40	
	8	12 260			13	47	13 556			13	47	14 852			13	47	
	10	15 325			20	52	16 945			20	53	18 565			20	53	
	500	4	0.500	0.473	6 811	3	29	0.550	0.523	7 531	3	29	0.600	0.573	8 251	3	30
	6	10 217			7	39	11 297			7	40	12 377			7	40	
	8	13 622			13	47	15 062			13	47	16 502			13	48	
	10	17 028			20	53	18 828			20	53	20 628			20	54	
	550	4	0.550	0.520	7 492	3	29	0.605	0.575	8 284	3	30	0.660	0.630	9 076	3	30
	6	11 238			7	40	12 426			7	40	13 614			7	41	
	8	14 985			13	47	16 569			13	48	18 153			13	48	
	10	18 731			20	53	20 711			20	54	22 691			20	54	
	600	4	0.600	0.568	8 173	3	29	0.660	0.628	9 037	3	29	0.720	0.688	9 901	3	29
	6	12 260			7	40	13 556			6	39	14 852			6	40	
	8	16 347			12	47	18 075			12	47	19 803			12	47	
	10	20 434			19	53	22 594			18	53	24 754			18	53	
	650	4	0.650	0.615	8 855	3	29	0.715	0.680	9 791	3	29	0.780	0.745	10 727	3	30
	6	13 282			7	40	14 686			6	40	16 090			6	40	
	8	17 709			12	47	19 581			12	47	21 453			12	48	
	10	22 136			19	53	24 476			18	53	26 816			18	53	
	700	4	0.700	0.662	9 536	3	27	0.770	0.732	10 544	2	27	0.840	0.802	11 552	2	27
	6	14 304			6	38	15 816			5	38	17 328			5	38	
	8	19 071			10	46	21 087			10	45	23 103			10	46	
	10	23 839			16	51	26 359			15	51	28 879			15	51	
	800	4	0.800	0.757	10 898	3	28	0.880	0.837	12 050	2	28	0.960	0.917	13 202	2	28
	6	16 347			6	39	18 075			5	38	19 803			5	39	
	8	21 796			10	46	24 100			10	46	26 404			10	46	
	10	27 245			16	52	30 125			15	52	33 005			15	52	
	900	4	0.900	0.851	12 260	3	29	0.990	0.941	13 556	3	29	1.080	1.031	14 852	2	29
	6	18 390			6	39	20 334			6	40	22 278			5	39	
	8	24 520			10	47	27 112			10	47	29 704			10	47	
	10	30 650			16	52	33 890			16	53	37 130			15	52	
	1000	4	1.000	0.946	13 622	3	29	1.100	1.046	15 062	2	29	1.200	1.146	16 502	2	28
	6	20 434			6	40	22 594			5	39	24 754			5	39	
	8	27 245			10	47	30 125			10	47	33 005			9	46	
	10	34 056			16	53	37 656			15	52	41 256			14	52	
	1100	4	1.100	1.041	14 985	3	29	1.210	1.151	16 569	2	29	1.320	1.261	18 153	2	29
	6	22 477			6	40	24 853			5	40	27 229			5	39	
	8	29 969			10	48	33 137			10	47	36 305			9	47	
	10	37 462			16	53	41 422			15	53	45 382			14	52	
	1200	4	1.200	1.135	16 347	2	28	1.320	1.255	18 075	10	47	1.440	1.375	19 803	2	28
	6	24 520			5	39	27 112			22	58	29 704			5	39	
	8	32 694			9	46	36 150			38	66	39 606			8	46	
	10	40 867			14	52	45 187			14	52	49 507			13	52	
	1300	4	1.300	1.230	17 709	2	28	1.430	1.360	19 581	2	28	1.560	1.490	21 453	2	28
6	26 564	5			39	29 372	5			38	32 180	5			39		
8	35 418	9			46	39 162	8			46	42 906	8			46		
10	44 273	14			52	48 953	13			52	53 633	13			52		
1400	4	1.400	1.324	19 071	2	29	1.540	1.464	21 087	2	28	1.680	1.604	23 103	2	28	
6	28 607			5	39	31 631			5	39	34 655			4	38		
8	38 143			9	47	42 175			8	46	46 207			8	46		
10	47 678			14	53	52 718			13	52	57 758			12	51		
1500	4	1.500	1.419	20 434	2	28	1.650	1.569	22 594	2	29	1.800	1.719	24 754	2	28	
6	30 650			5	39	33 890			5	39	37 130			4	38		
8	40 867			8	46	45 187			8	47	49 507			8	46		
10	51 084			13	52	56 484			13	52	61 884			12	52		

B – nominal width [mm]
H – nominal height [mm]

v – velocity [m/s]
Sk – duct cross section [m²]
Se – damper active cross section [m²]

Q – flow [m³/h]
Dp – pressure drop [Pa]
L_{WA} – damper noise level [dB]

		height H [mm]														
		1300					1400					1500				
	v [m/s]	Sk [m ²]	Se [m ²]	Q [m ³ /h]	dp [Pa]	L _{WA} [dB]	Sk [m ²]	Se [m ²]	Q [m ³ /h]	dp [Pa]	L _{WA} [dB]	Sk [m ²]	Se [m ²]	Q [m ³ /h]	dp [Pa]	L _{WA} [dB]
width B [mm]	4	0.260	0.249	3 588	4	30	0.280	0.269	3 876	4	29	0.300	0.289	4 164	4	29
	6			5 383	9	40			5 815	9	40			6 247	9	40
	8			7 177	17	48			7 753	16	47			8 329	15	47
	10			8 971	26	53			9 691	25	53			10 411	24	53
	4	0.325	0.312	4 486	4	31	0.350	0.337	4 846	4	30	0.375	0.362	4 164	4	30
	6			6 728	9	41			7 268	9	40			6 247	8	40
	8			8 971	17	49			9 691	15	48			8 329	15	48
	10			11 214	26	54			12 114	24	54			10 411	23	53
	4	0.390	0.374	5 383	4	31	0.420	0.404	5 815	4	31	0.450	0.434	6 247	4	30
	6			8 074	9	41			8 722	9	41			9 370	8	40
	8			10 765	16	49			11 629	15	49			12 493	14	48
	10			13 457	25	55			14 537	24	54			15 617	22	54
	4	0.455	0.436	6 280	4	30	0.490	0.471	6 784	3	30	0.525	0.506	7 288	3	30
	6			9 420	8	41			10 176	8	40			10 932	8	40
	8			12 560	15	48			13 568	13	48			14 576	13	48
	10			15 700	23	54			16 960	21	53			18 220	21	54
	4	0.520	0.498	7 177	3	29	0.560	0.538	7 753	3	29	0.600	0.578	8 329	3	30
	6			10 765	7	40			11 629	7	40			12 493	7	40
	8			14 354	13	47			15 506	13	48			16 658	13	48
	10			17 942	20	53			19 382	20	53			20 822	20	54
	4	0.585	0.561	8 074	3	29	0.630	0.606	8 722	3	29	0.675	0.651	9 370	3	30
	6			12 111	7	40			13 083	7	40			14 055	7	40
	8			16 148	12	47			17 444	12	47			18 740	12	48
	10			20 185	19	53			21 805	19	53			23 425	19	53
	4	0.650	0.623	8 971	3	29	0.700	0.673	9 691	3	30	0.750	0.723	10 411	3	30
	6			13 457	7	40			14 537	7	40			15 617	7	41
	8			17 942	12	48			19 382	12	48			20 822	12	48
	10			22 428	19	53			24 228	19	54			26 028	19	54
	4	0.715	0.685	9 868	3	30	0.770	0.740	10 660	3	30	0.825	0.795	11 452	3	31
	6			14 802	7	40			15 990	7	41			17 178	7	41
	8			19 737	12	48			21 321	12	48			22 905	12	49
	10			24 671	19	54			26 651	19	54			28 631	19	54
	4	0.780	0.748	10 765	3	29	0.840	0.808	11 629	3	29	0.900	0.868	12 493	3	29
	6			16 148	6	39			17 444	6	40			18 740	6	40
	8			21 531	11	47			23 259	11	47			24 987	11	48
	10			26 914	17	53			29 074	17	53			31 234	17	53
	4	0.845	0.810	11 663	3	29	0.910	0.875	12 599	3	29	0.975	0.940	13 535	3	30
	6			17 494	6	40			18 898	6	40			20 302	6	40
	8			23 325	11	47			25 197	11	48			27 069	11	48
	10			29 156	17	53			31 496	17	53			33 836	17	54
	4	0.910	0.872	12 560	2	28	0.980	0.942	13 568	2	28	1.050	1.012	14 576	2	28
	6			18 840	5	38			20 352	5	39			21 864	5	39
	8			25 119	10	46			27 135	10	46			29 151	10	47
	10			31 399	15	52			33 919	15	52			36 439	15	52
	4	1.040	0.997	14 354	2	28	1.120	1.077	15 506	2	29	1.200	1.157	16 658	2	29
	6			21 531	5	39			23 259	5	39			24 987	5	40
	8			28 708	10	46			31 012	10	47			33 316	10	47
	10			35 885	15	52			38 765	15	53			41 645	15	53
	4	1.170	1.121	16 148	2	29	1.260	1.211	17 444	2	29	1.350	1.301	18 740	2	30
	6			24 222	5	39			26 166	5	40			28 110	5	40
	8			32 296	10	47			34 888	10	47			37 480	10	48
	10			40 370	15	53			43 610	15	53			46 850	15	53
	4	1.300	1.246	17 942	2	28	1.400	1.346	19 382	2	28	1.500	1.446	20 822	2	28
	6			26 914	5	39			29 074	5	38			31 234	5	39
	8			35 885	9	47			38 765	8	46			41 645	8	46
	10			44 856	14	52			48 456	13	52			52 056	13	52
	4	1.430	1.371	19 737	2	29	1.540	1.481	21 321	2	27	1.650	1.591	22 905	2	26
	6			29 605	5	39			31 981	4	38			34 357	4	37
	8			39 473	9	47			42 641	8	45			45 809	7	44
	10			49 342	14	53			53 302	12	51			57 262	11	50
	4	1.560	1.495	21 531	2	28	1.680	1.615	23 259	2	28	1.800	1.735	24 987	2	26
	6			32 296	5	39			34 888	4	38			37 480	4	36
	8			43 062	8	46			46 518	8	46			49 974	6	44
	10			53 827	13	52			58 147	12	51			62 467	10	49
	4	1.690	1.620	23 325	2	28	1.820	1.750	25 197	2	27					
	6			34 988	4	38			37 796	4	37					
	8			46 650	8	46			50 394	7	45					
	10			58 313	12	51			62 993	11	51					
	4	1.820	1.744	25 119	2	28										
	6			37 679	4	39										
	8			50 239	8	46										
	10			62 798	12	52										

7. Technical parameters of FID S/S p/O circular dampers

D – nominal diameter [mm]

v – velocity [m/s]

Q – flow [m³/h]

Sk – duct cross section [m²]

Dp – pressure drop [Pa]

Se – damper active cross section [m²]

L_{WA} – damper noise level [dB]

D [mm]	v [m/s]	Sk [m ²]	Se [m ²]	Q [m ³ /h]	dP [Pa]	L _{WA} [dB]	D [mm]	v [m/s]	Sk [m ²]	Se [m ²]	Q [m ³ /h]	dP [Pa]	L _{WA} [dB]
250	2	0.0491	0.0392	281	1	15	450	2	0.1590	0.1410	1 015	1	16
	4			560	4	24		4			2 030	4	25
	6			890	8	28		6			3 045	10	35
	8			1 130	11	33		8			4 060	18	41
315	2	0.0779	0.0653	478	1	18	500	2	0.1963	0.1763	1 269	1	18
	4			949	4	24		4			2 538	4	24
	6			1 400	8	30		6			3 807	8	33
	8			1 880	16	35		8			5 076	15	40
355	2	0.0989	0.0847	610	1	17	560	2	0.2462	0.2238	1 611	1	16
	4			1 220	5	24		4			3 222	3	24
	6			1 830	11	34		6			4 834	7	33
	8			2 440	20	40		8			6 445	13	39
400	2	0.1256	0.1096	789	1	17	630	2	0.3116	0.2864	2 062	1	20
	4			1 578	5	25		4			4 124	2	22
	6			2 367	11	34		6			6 186	5	33
	8			3 156	10	41		8			8 247	9	40

8. Estimated Weights of FID S/S p/P dampers for rectangular ventilation ducts [kg]


		width B [mm]														
		200	250	300	400	500	600	700	800	900	1000	1100	1200	1300	1400	1500
height H [mm]	200	9.5	9.7	10	10	15	17	17.5	19	22	25	28	30	33	39	45
	250	9.5	10	11	11	16	17.5	18	21	24	27	29	32	34	45	48
	300	10	11	11	12	17	20	21	23	26	28	31	34	38	50	51
	350	11	11	11	16	18	20.5	23	26	28	29	33	35	36	52	53
	400	10	11	12	18	19	21	25	29	30	33	35	36	39	54	55
	500	15	16	17	19	20	23	27	32	33	35	38	40	44	55	56
	600	17	17.5	20	21	30	26	30	35	37	39	43	48	52	56	58
	700	17.5	18	21	23	30	35	35	40	42	44	47	52	54	57	65
	800	20	21	22	24	29	35	37	41	43	49	52	57	60	62	78
	900	22	25	25	28	33	35	39	43	47	53	56	60	62	64	82
	1000	23	29	28	33	36	42	43	49	53	56	59	65	67	69	98
	1100	26	30	31	35	38	42	47	56	59	62	63	69	71	73	101
	1200	32	33	35	36	40	49	53	56	61	71	72	73	85	86	105
	1300	39	40	38	39	44	52	57	59	78	79	80	81	92		
	1400	–	–	48	39	48	56	63	65	80	82	85	87			
	1500	–	–	50	50	52	58	68	71	82	98	115	120			

i For dampers with no actuator, subtract ~1 kg.

9. Estimated Weights of FID S/S p/O dampers for rectangular ventilation ducts [kg]

diameter D [mm]	RST, RST-KW1	actuator
125	4	5
160	5	6
200	6	7
250	7	8
315	9	10
355	12	13
400	14	15
500	16	17
630	20	21

10. Marking

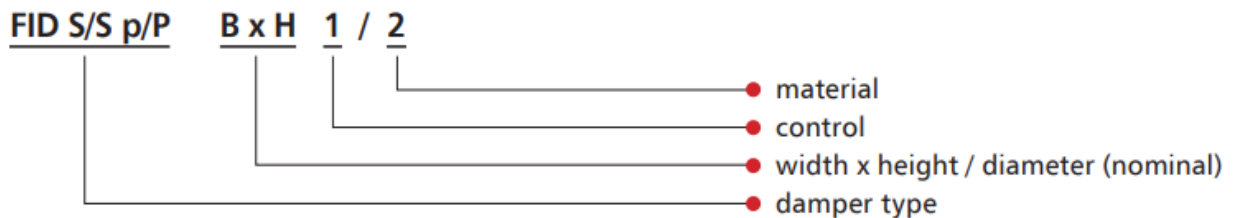

1 – Control:

- RST trigger control mechanism
 - RST** – thermal trigger
 - RST/WK1** – thermal trigger + limit switch (closed blade signal)
 - RST/WK2** – thermal trigger + limit switch (open/closed blade signal)
- RST-KW1 trigger control mechanism
 - RST-KW1/S** – thermal trigger
 - RST-KW1/S/WK2** – thermal trigger + limit switch (open/closed blade signal)
 - RST-KW1/24I** – thermal trigger + „pulse” electromagnetic trigger, U = 24 V DC + limit switch (open/closed blade signal)
 - RST-KW1/24P** – thermal trigger + „break” electromagnetic trigger, U = 24 V DC + limit switch (open/closed blade signal)
 - RST-KW1/230I** – thermal trigger + „pulse” electromagnetic trigger, U = 230 V AC + limit switch (open/closed blade signal)
 - RST-KW1/230P** – thermal trigger + „break” electromagnetic trigger, U = 230 V AC + limit switch (open/closed blade signal)
- Belimo trigger control mechanism
 - BF24-T** – actuator with a return spring, U = 24 V AC/DC
 - BF230-T** – actuator with a return spring, U = 230 V AC
 - BF24TL-T-ST** (with the BKN230-24MP option) – actuator with a return spring, U = 24 V, MP Bus digital control
 - EXBF24-T** – explosion proof actuator with a return spring in the Ex version, U = 24 V AC/DC

EXBF230-T – explosion proof actuator with a return spring in the Ex version, U = 230 V AC
BF24-T-ST (with the BKN230-24 option) – actuator with a return spring, for the SBS Control system

BFL24-T – actuator with a return spring, U = 24 V AC/DC BFL230-T – actuator with a return spring, U = 230 V AC

BFL24-T-ST (with the BKN230-24 option) – actuator with a return spring, for the SBS Control system

BFN24-T – actuator with a return spring, U = 24 V AC/DC BFN230-T – actuator with a return spring, U = 230 V AC

BFN24-T-ST (with the BKN230-24 option) – actuator with a return spring, for the SBS Control system

BFN24-T – actuator with a return spring, U = 24 V AC/DC

BFN230-T – actuator with a return spring, U = 230 V AC

BFN24-T-ST (with the BKN230-24 option) – actuator with a return spring, for the SBS Control system

2 – Material:

[No symbol] – galvanized steel, Zn 275 g/m² coating

KN – 1.4404 acid-proof stainless steel

Example marking:

FID S/S p/P 400 x 400 BFL24-T

EIS120 low-resistance cut-off damper with a 24 V compact Belimo actuator with limit switches.

FID S/S p/O Ø400 RST / WK2

EIS120 cut-off fire damper with a trigger rated at 72°C and a partition opening and closing limit switch.

11. Power Supply Control

11.1 Cooperation with smoke exhaust/cut-off dampers – drive quick selection table


	FID S/S c/P	FID S/S p/P FID S/S p/O	FID S/V p/P FID S/V-M p/P	FID PRO	WIP/ S	WIP/T	WIP/T- G	WIP/V WIP/V-M	WIP PRO/S	WIP PRO/V WIP PRO/V- M
BF24-T (ST)		X			X	X			X	
BF230-T		X			X	X			X	
BFL24-T (-ST)	X	X		X	X	X			X	
BFL230-T	X	X		X	X	X			X	
BFN24-T (-ST)	X	X			X	X			X	
BFN230-T	X	X			X	X			X	
BE24			X			X		X		X
BE230			X			X		X		X
BLE24			X			X		X		X
BLE230			X			X		X		X
EXBF24-T	X	X		X	X	X			X	
EXBF230-T	X	X		X	X	X			X	
BF24TL-T (-ST)	X	X		X	X	X			X	
RST	X	X		X						
RST/WK1	X	X		X						
RST/WK2	X	X		X						
RST-KW1/S	X	X		X						
RST-KW1/S/WK2	X	X		X	X	X	X		X	
RST-KW1/24I	X	X		X						
RST-KW1/24P	X	X		X					X	
RST-KW1/230I	X	X		X						
RST-KW1/230P	X	X		X					X	
BF24 (-ST)							X			
BF230							X			
BFL24 (-ST)							X			
BFL230							X			
BFN24 (-ST)							X			
BFN230							X			

11.2 Actuators

11.2.1 BF electric actuators

SPECIFICATIONS	BF24 (BF24-T)	BF230 (BF230-T)
Power supply	AC 24 V 50/60 Hz DC 24 V	AC 220-240 V 50/60 Hz
Power demand:		
- For spring tensioning	7 W	8 W
- For holding	2 W	3 W
Sizing (apparent power)	10 VA	11 VA
Protection class	III	II
Ingress protection rating	IP 54	IP 54
Auxiliary circuit breaker:	2 x EPU 3 (0.5) A 250 V	2 x EPU 3 (0.5) A 250 V~
- Activation position	5°, 80°	5°, 80°
Torque		
- Motor	18 Nm	18 Nm
- Return spring	12 Nm	12 Nm
Cable connection:		
- Motor (length: 0.9 m)	2 x 0.75 mm ²	2 x 0.75 mm ²
- Auxiliary circuit breaker	6 x 0.75 mm ²	2 x 0.75 mm ²
Movement time (0-90°)		
- Motor	120 s	120 s
- Return spring	~16 s	~16 s
Operating temperature range	-30...+50°C	-30...+50°C
Sound intensity level:		
- Motor	max 45 dB (A)	max 45 dB (A)
- Return spring	~63 dB (A)	~63 dB (A)

11.2.1.1 Electrical diagram of the BF...-T series actuator:

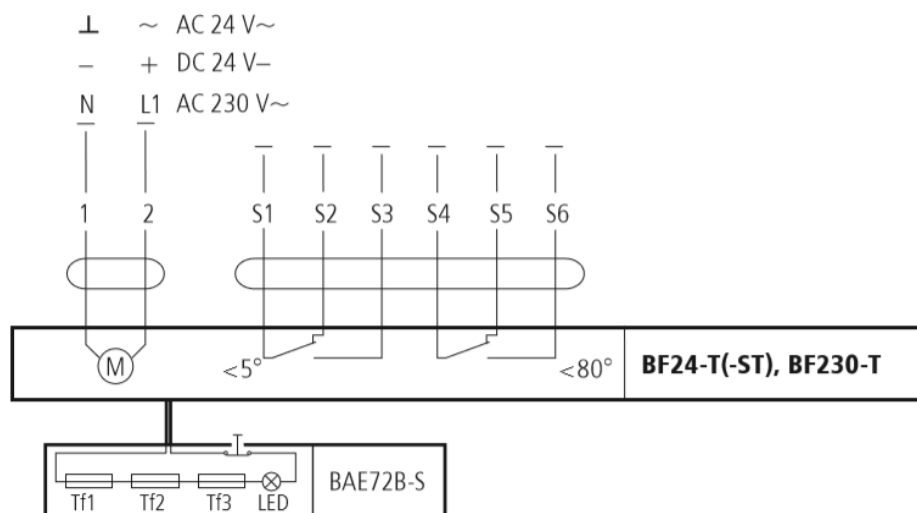


note: 24 V connection through a safety transformer.

To disconnect the 230 V actuator from the mains, the gap of at least 3 mm between the contacts (when off) is required in the switch. It is possible to connect further actuators in parallel. Check the power consumption.


note:

The location of the actuator limit switches is shown for the no voltage position.

11.2.1.2 Electrical diagram of the BF24TL-T(-ST) and BF24TL(-ST) actuator:

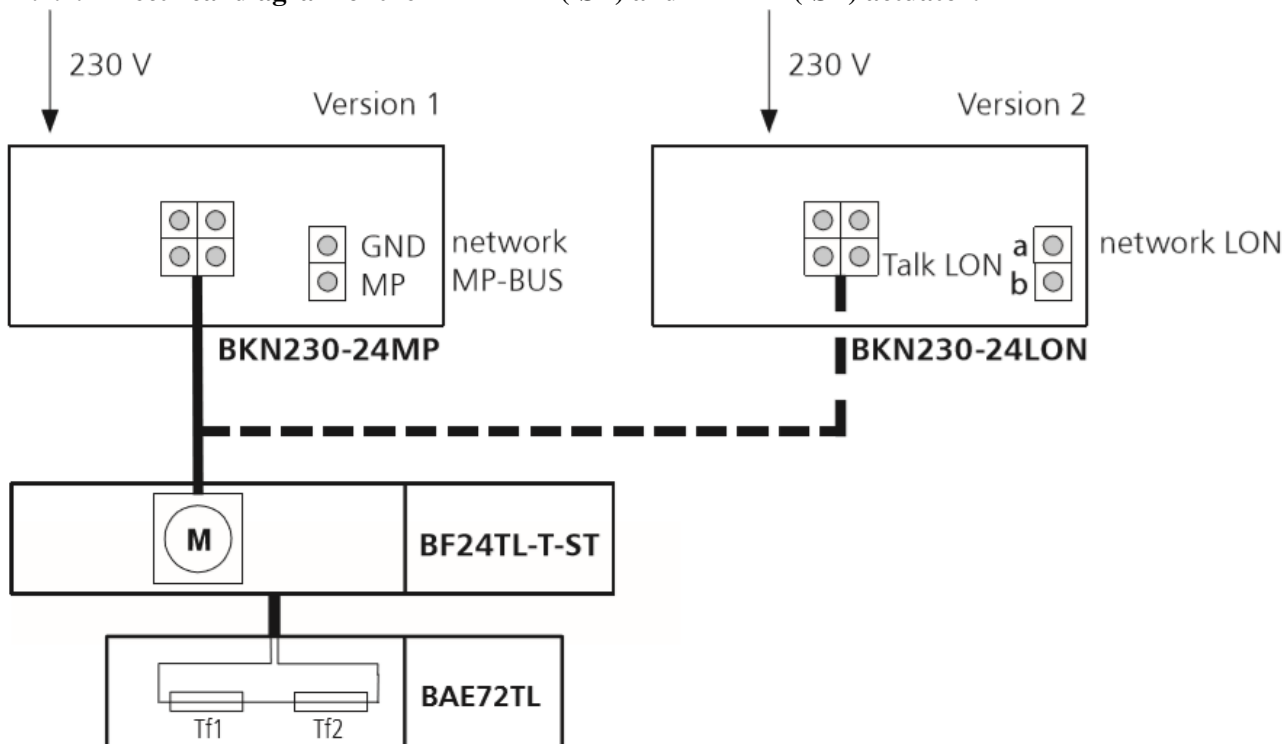

11.2.1.3 Electrical Diagram of the BF series actuator:

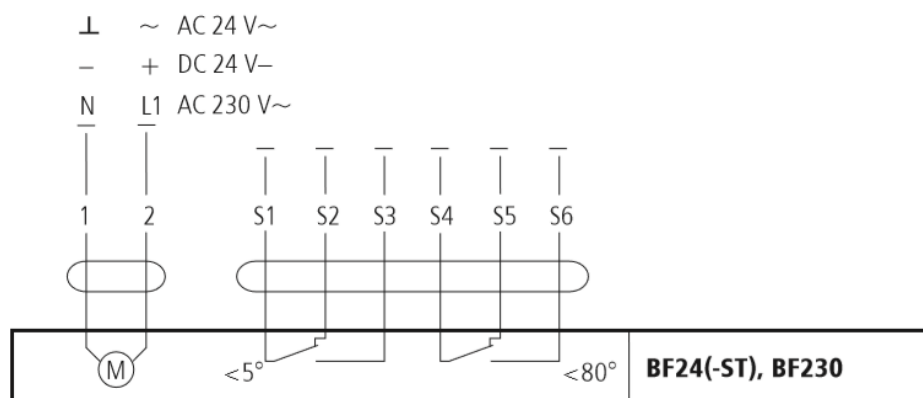


note: 24 V connection through a safety transformer. To disconnect the 230 V actuator from the mains, the gap of at least 3 mm between the contacts (when off) is required in the switch. It is possible to connect further actuators in parallel. Check the power consumption.

note: The location of the actuator limit switches is shown for the no voltage position.

11.2.2 BE, BLE electric actuators

Specifications	BE24, BE24-ST	BE230	BLE24	BLE230
Power Supply	AC 24 V 50/60 Hz	AC 230 V 50/60 Hz	AC 24 V 50/60 Hz DC 24 V	AC 230 V 50/60 Hz
Power demand:				
- In movement	12 W	8 W	7.5 W	5 W
- For holding	0.5 W	0.5 W	0.5 W	0.5
Sizing (apparent power)	18 VA	15 VA	9 VA	12 VA
Protection class	III	II	III	II
Ingress protection rating	IP 54	IP 54	IP 54	IP 54
Auxiliary circuit breaker:	2 x SPDT 6 (1.5) A AC 250 V	2 x SPDT 6 (1.5) A AC 250 V	2 x EPU 3 (1.5) A 250 V	2 x EPU 3 (1.5) A 250 V~
- Activation position	5°, 80°	5°, 80°	5°, 80°	5°, 80°
Torque - motor	40 Nm	40 Nm	15 Nm	15 Nm
Movement time (0-90°) – motor	< 60 s for 90°	< 60 s for 90°	< 30 s for 90°	< 30 s for 90°
Operating temperature	-30...+50°C	-30...+50°C	-30...+50°C	-30...+50°C
Sound intensity level	~62 dB (A)	~62 dB (A)	~62 dB (A)	~62 dB (A)

11.2.2.1 Electric diagram of the BE, BLE series actuator

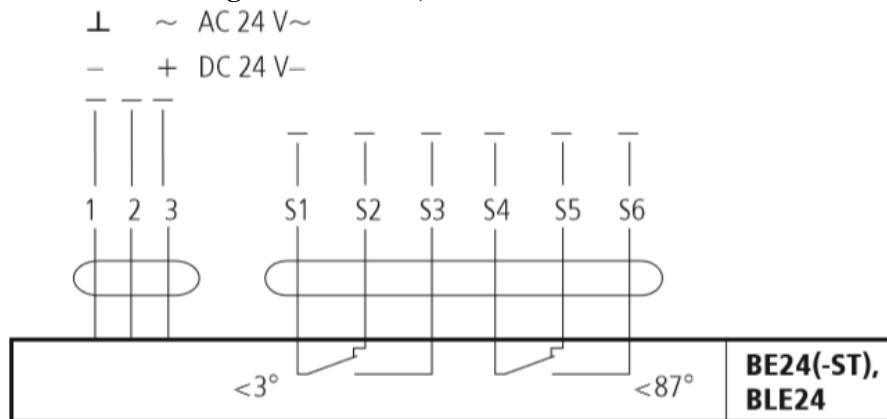


note:

The actuator operation control requires routing three wire system to it. The actuator rotation sense is changed by the application of the power supply voltage to the terminal 2 or 3, depending on the desired direction.

note: 24 V connection through a safety transformer.

To disconnect the 230 V actuator from the mains, the gap of at least 3 mm between the contacts (when off) is required in the switch. It is possible to connect further drives in parallel. Check the power consumption.

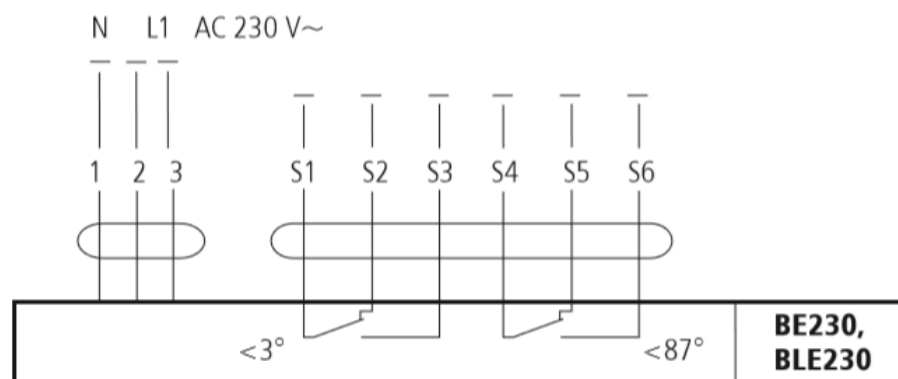


note:

The location of the actuator limit switches is shown for the no voltage position.

11.2.3 BFL, BFN ELECTRIC ACTUATORS

Specifications	BFL24 (BFL24-T)	BFL230 (BFL230-T)	BFN24 (BFN24-T)	BFN230 (BFN230-T)
Power Supply	AC 24 V 50/60 Hz DC 24 V	AC 220-240 V 50/60 Hz	AC 24 V 50/60 Hz DC 24 V	AC 220-240 V 50/60 Hz
Power demand:				
- Spring tensioning	2.5 W	3.5 W	4 W	5 W
- For holding	0.7 W	1.1 W	1.4 W	2.1
Sizing (apparent power)	4 VA	6.5 VA	6 VA	10 VA
Protection class	III	II	III	II
Ingress protection rating	IP 54	IP 54	IP 54	IP 54
Auxiliary circuit breaker:	2 x SPDT 3 (0.5) A AC 250 V	2 x SPDT 3 (0.5) A AC 250 V	2 x EPU 3 (0.5) A 250 V	2 x EPU 3 (0.5) A 250 V
- Activation position	5°, 80°	5°, 80°	5°, 80°	5°, 80°
Torque				
- motor	4 Nm	4 Nm	9 Nm	9 Nm
- return spring	3 Nm	3 Nm	7 Nm	7 Nm
Movement time (0-90°):				
- motor	< 60 s	< 60 s	< 60 s	< 60 s
- return spring	~20 s	~20 s	~20 s	~20 s
Operating temperature	-30...+55°C	-30...+55°C	-30...+55°C	-30...+55°C
Sound intensity level				
- motor	max 43 dB (A)	max 43 dB (A)	max 55 dB (A)	max 55 dB (A)
- return spring	~62 dB (A)	~62 dB (A)	~67 dB (A)	~67 dB (A)


11.2.3.1 Electrical diagram of the BFL...-T, BFN...-T series actuator:

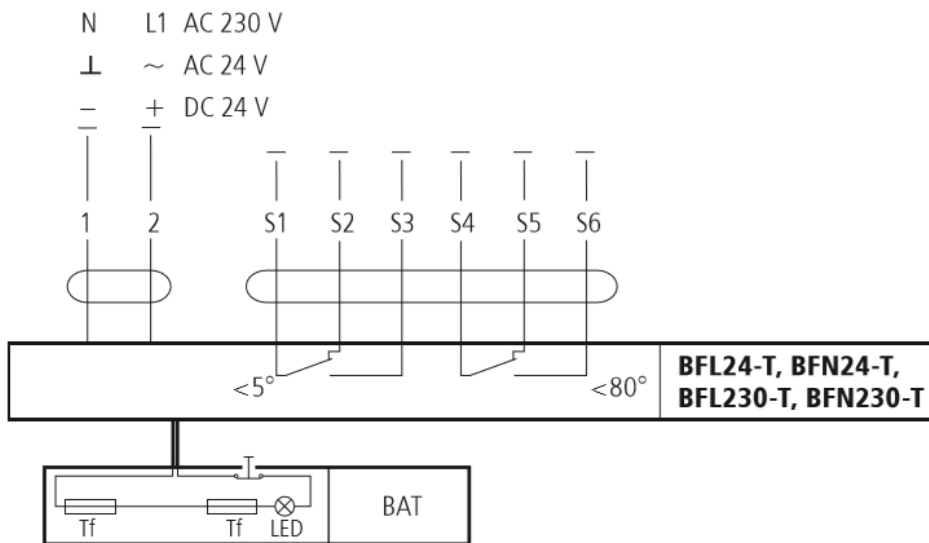

note: 24 V connection through a safety transformer. To disconnect the 230 V actuator from the mains, the gap of at least 3 mm between the contacts (when off) is required in the switch. It is possible to connect further actuators in parallel. Check the power consumption.

note: The location of the actuator limit switches is shown for the no voltage position.

11.2.3.2 Electrical diagram of the BFL, BFN series actuator:

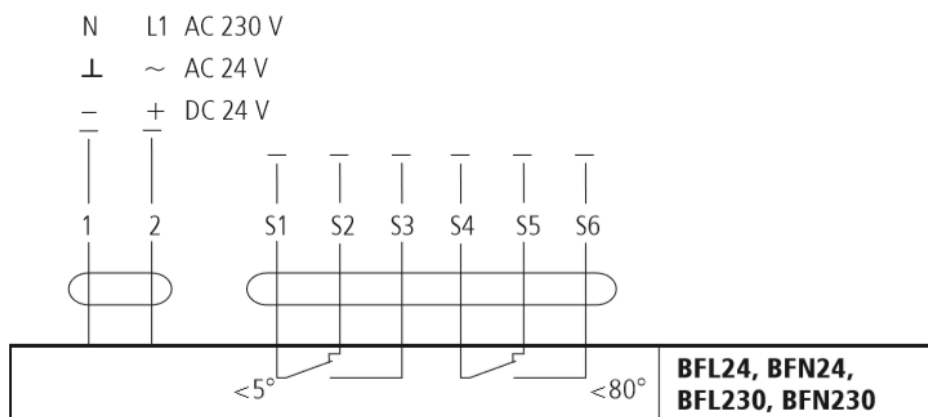

note: 24 V connection through a safety transformer.

To disconnect the 230 V actuator from the mains, the gap of at least 3 mm between the contacts (when off) is required in the switch. It is possible to connect further actuators in parallel. Check the power consumption.


note:

The location of the actuator limit switches is shown for the no voltage position.

11.2.4 EXBF actuators

SPECIFICATIONS	EXBF B 001 2...0 N 000	EXBF A 001 2 ...0 N 000
Zone	1, 2, 21, 22	
ATEX-rating	II 2 GD EEx d IIC T6	
Power supply	24 V AC $\pm 20\%$ 50/60 Hz / 24 V DC - 10/+20%	230 V AC $\pm 14\%$ 50/60 Hz
Power demand:		
- For spring tensioning	7 W	8 W
- For holding	2 W	3 W
Sizing (apparent power)	10 VA	11 VA
Ingress protection rating	IP 66	IP 66
Auxiliary circuit breaker:	2 x SPDT 6 A (3) max 250 v AC	2 x SPDT 6 A (3) max 250 V AC
- Activation position	5°, 80°	5°, 80°
Torque:		
- Motor	18 Nm	18 Nm
- Return spring	12 Nm	12 Nm
Movement time (0-90°)		
- Motor	150 s	150 s
- Return spring	~20 s	~20 s
Ambient temperature	-30...+50°C	-30...+50°C


11.2.4.1 Connection diagram for EXBF and EXBF...-T actuators:

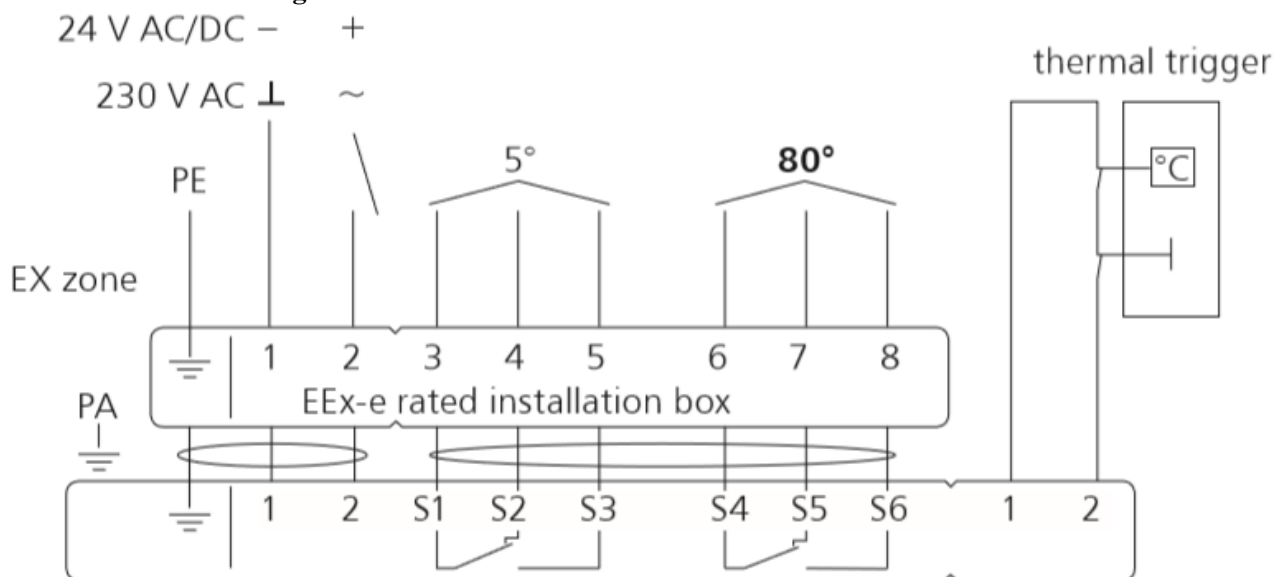

11.3 RST trigger control mechanisms

In the RST version the WK1 limit switches are independent units installed inside the fire damper casing. The thermal trigger is on the damper blade. The driving spring is installed on the damper blade or in a guard box on its casing.

1. Moving hook with nut
2. Fusible link
3. Fixed hook on the damper blade
4. Damper blade
5. Drive spring

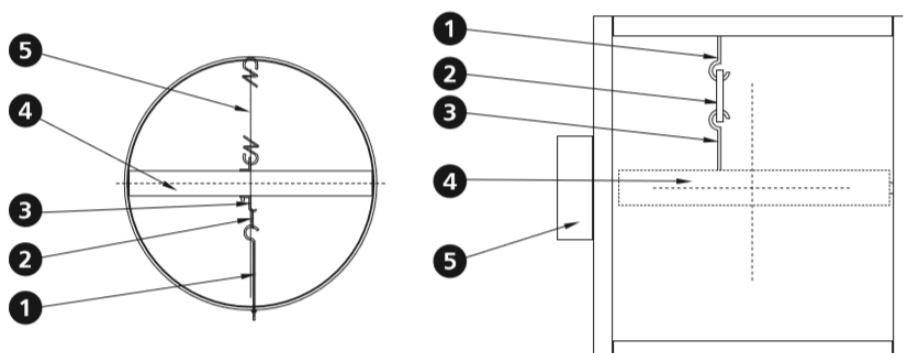

11.3.1 Independent limit switches – RST version


WK1 – limit switch (closed damper blade signal)

WK2 – limit switch (closed/open damper blade signal)

11.3.2 Switch specifications

WK1 and WK2 limit switch	1xNO/1xNC SPDT 5 A, 230 V AC
Limit switch operating temperature	-25 ... +85°C
Casing	plastic

11.3.2.1 Electric connection diagram of WK1 and WK2 limit switches

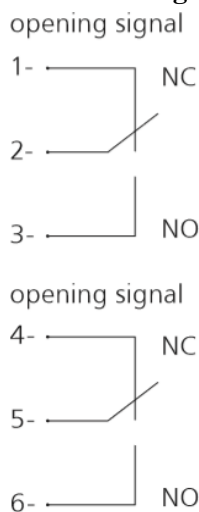

note:

When the damper blade closes, the closed indication limit switch is switched over (contacts 2-3 are closed).

11.4 RST-KW1 mechanisms

	RST-KW1/S	RST-KW1/S/WK2	RST-KW1/24I	RST-KW1/24P	RST-KW1/230I	RST-KW1/230P
Rated voltage	-	-	24 V – 48 V DC	24 V – 48 V DC	230 AC	230 AC
Power consumption	-	-	3.5 W	1.6 W	2 W	2 W
Thermal trigger	74°C (optionally 95°C)					
Connections – trigger	-	-	Wire 0.6m, 2 x 0.5 mm ²			
Connections – limit switches	-	Wire 0.6m, 6 x 0.5 mm ²				
Limit switch	-	2 x BI/NC 5A, 230 V AC				
Movement time	max. 2 s					
Mechanism operation control (closing)	-	-	Voltage application „pulse”	Voltage removal „break”	Voltage application „pulse”	Voltage removal „break”
Mechanism operation control (opening)	Manual	Manual	Manual	Manual	Manual	Manual
Pulse width	max. 1 s					

11.4.1 Description of electrical connections:



RST-KW1 mechanism power supply	Closing limit switch	Opening limit switch
Wire number: 1-2	Wire number: 3-4 – NO (normally open)	Wire number 6-7 – NO (normally open)
	Wire number 4-5 – NC (normally closed)	Wire number 7-8 – NC (normally closed)

11.5 Manufacture standards


Damper type	Description	Standard	Option
FID S/S c/P	Right damper	X	
	Inverse damper		X
	Left damper		X
	Actuator normal to the axis flow	X	
	Actuator along the axis flow		
FID S/S p/P FID S/V p/P	Right damper	X	
	Inverse damper		X
	Left damper		X
	Actuator normal to the axis flow	X	
	Actuator along the axis flow		X
FID S/S p/O	Right damper	X	
	Inverse damper		
	Left damper		
	Actuator normal to the axis flow	X	
	BF actuator along the v (exception)	X	
	Actuator along the axis flow		X
FID PRO	Right damper	X	
	Inverse damper		
	Left damper		
	Actuator normal to the axis flow	X	
	Actuator along the axis flow		X
WIP	Right damper		
	Inverse damper		X
	Left damper		X
	Actuator normal to the axis flow	X	
	Actuator along the axis flow	X	
WIP PRO	Right damper		X
	Inverse damper		X
	Left damper	X	
	Actuator normal to the axis flow	X	
	Actuator along the axis flow		

11.5.1 FID S/S c/P damper


right damper standard



inverse damper
(wires downward)

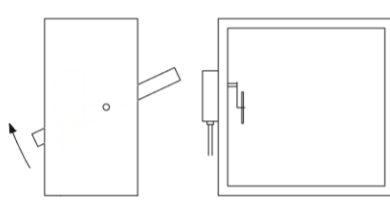

left damper

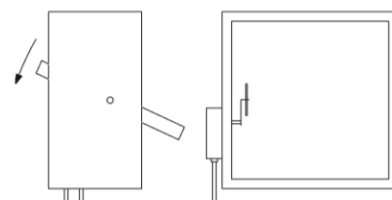


11.5.2 FID S/S p/P, FID S/S p/O, FID S/V p/P damper

right damper standard

inverse damper
(wires downward)


left damper

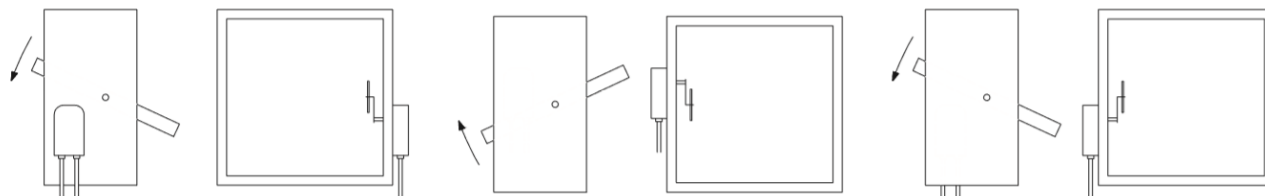

11.5.3 FID PRO/S damper

right damper
standard

actuator along the axis flow

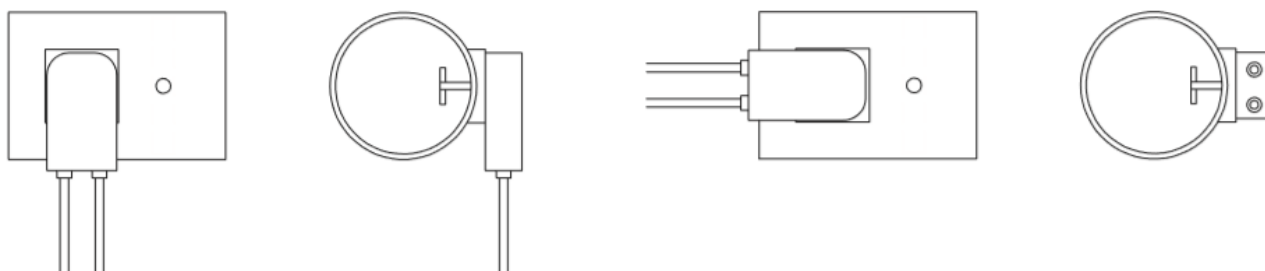

11.5.4 WIP/S, WIP/V, WIP/V-M, WIP/T, WIP/T-G damper

left damper
standard


inverse damper
(wires downward)



11.5.5 WIP PRO/S, WIP PRO/V, WIP PRO/V-M damper with an actuator

left damper
standard


inverse damper
reversed cable outlet

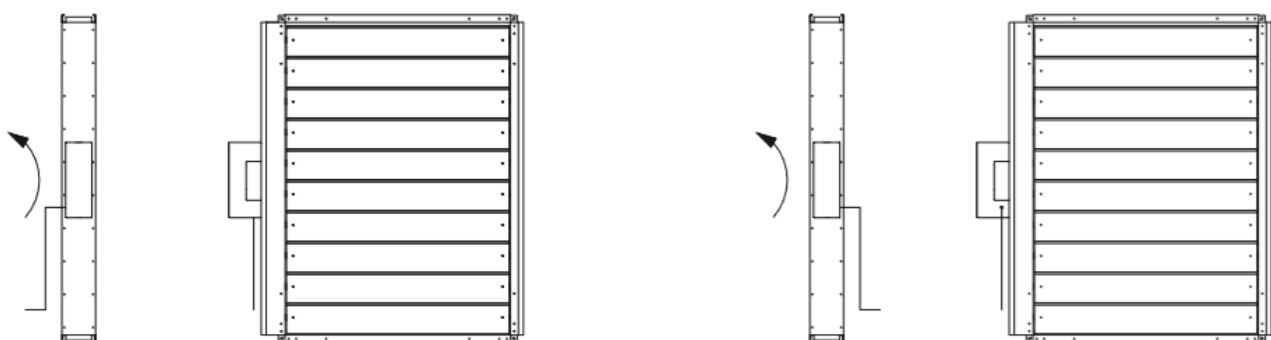


i Installation in reversed horizontal and vertical position available

11.5.6 WIP PRO/S, WIP PRO/V, VIP PRO/V-M damper with RST-KW1 mechanism

left damper
standard

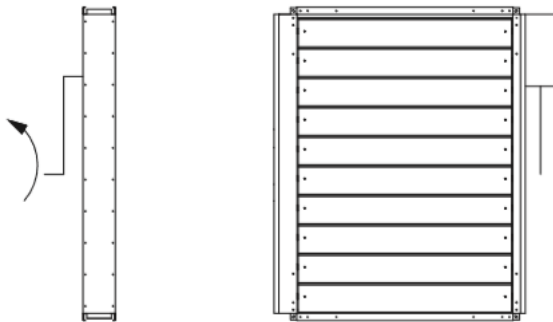

inverse damper
reversed cable outlet

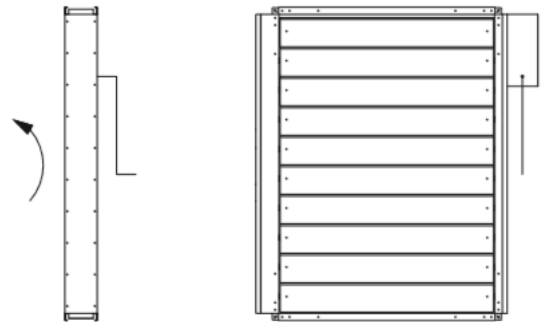

i Installation in reversed horizontal and vertical position available